

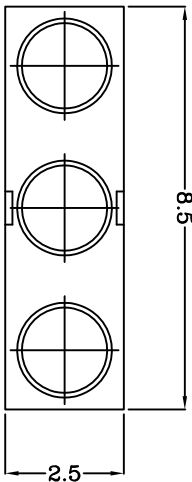
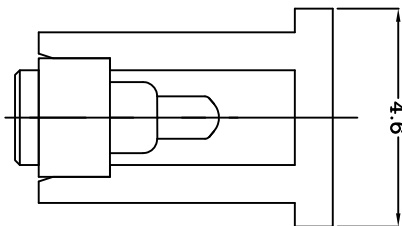
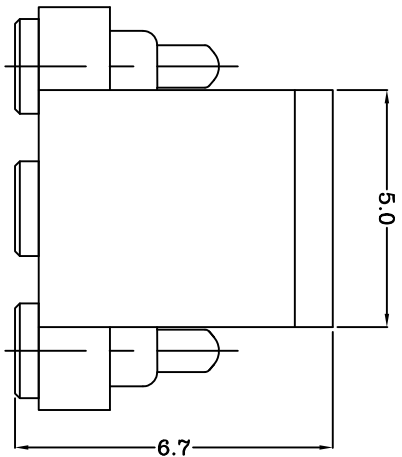
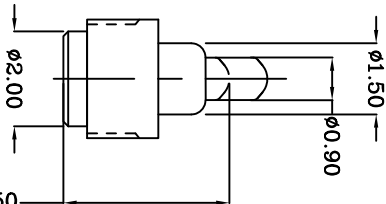


DWG NO.
C-100110

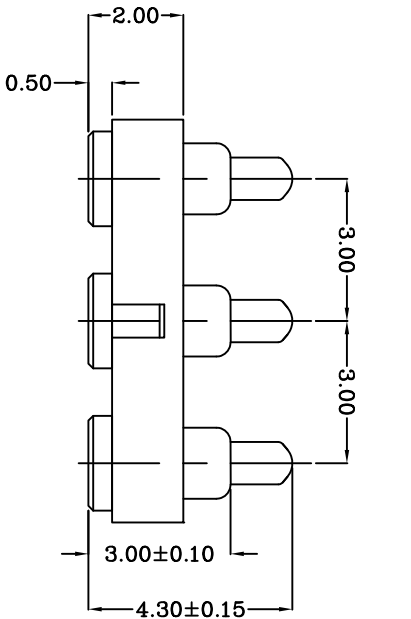

TOP-LINK

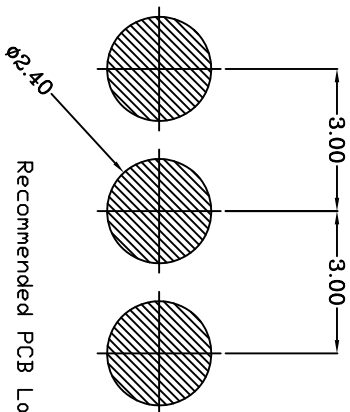

Recommended PCB Layout

- Notes:
- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color: Black.
Contact: Brass
Spring: SUS304
 - 2 Mechanical demands:
Plating Plunger: Min 0.4um Au over 1.4um Ni
Plating Body: Min 0.1um Au over 1.4um .
 - 3 Mechanical
1)Total stroke : 1.0mm
2)Durability: 10,000 cycle min.
 - 4 Electrical
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC
 - 5 Spring force: 120±25gf at 0.8mm stroke

LDC
-
DIST
-

NEW		DATE
REVISION	APVD	
RECORD		
LTR		

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	—
DWN		APVD	
Benny		Lansing	
CHK		REL	
Andy			
NAME			
PGGD 3P			
PGC-1.5-4.3-R-3P-3.0PH			
SCALE	1:1	A4	
DWG	NO. C-100110		
SHEET	1 OF 1		
REV	A		

100110-3
PART NUMBER

Top-Link
Electronics
Top-Link
Electronics Ltd.

USED ON

-