
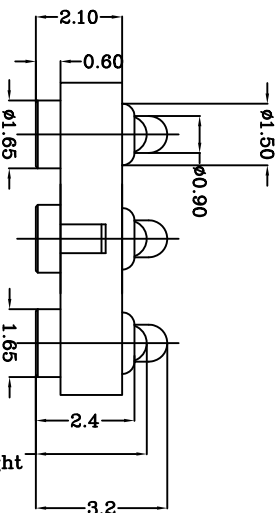




DWG NO.
C-100172

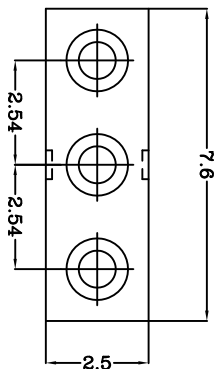

2.7
working height

Notes:
1 Material, Housing: PA 4.6 (30% Glass Filled)
Color: Black
2 Mechanical demands:
Plating Plunger: 0.4um Au over 1.25um Ni
Plating Body: 0.1um Au over 1.25um Ni.


TOP-LINK

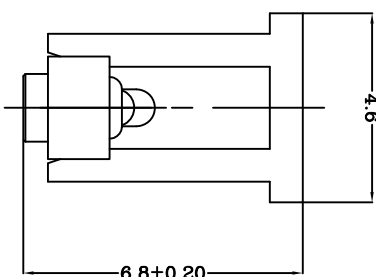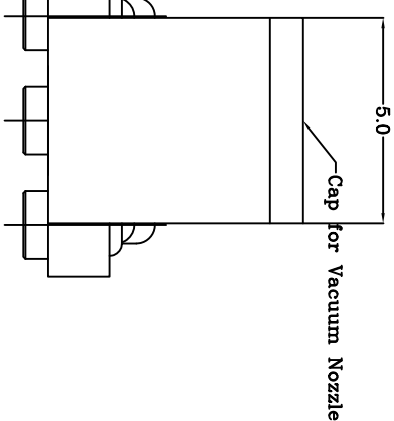

USED ON

Recommended PCB Layout

Recommended Solder Paste thickness is 0.10 mm



LDC				ANGLE: 11	NAME BATTERY POGO CONNECTOR 3 POSITIONS			
-		update remark		SURF TEXTURE: 32/ V	PGC-1.5-3.2-R-3P-2.54PH			
DIST				REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX	SCALE	A4	DWG NO.	SHEET 1 OF 1
-	LTR	REVISION RECORD	APVD	DATE	1:1		C-100172	REV B

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED	MATL		HT TR	—	FIN	—	
0 = ±	DWN		APVD		<i>Thorp-Linix</i> <u>Electronics</u> Top-Link Electronics Ltd.		
0.0 = ±0.15	QIN		Loansing				
0.00 = ±0.10	CHK		REL				
0.000 = ±	Jlm						

100172-3
PART NUMBER