

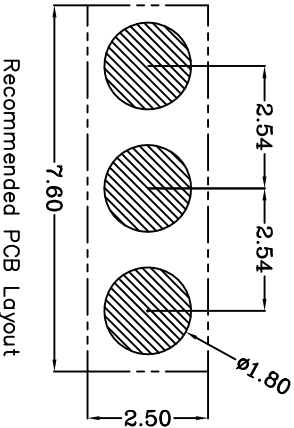


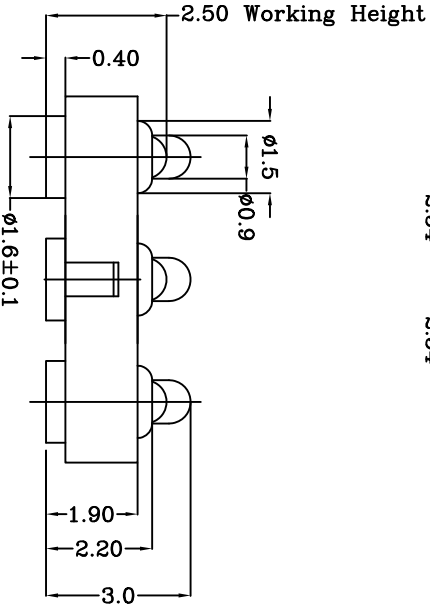

proposal

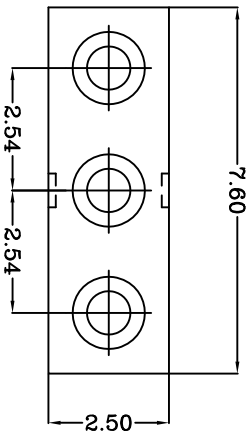

Cap for Vacuum Nozzle

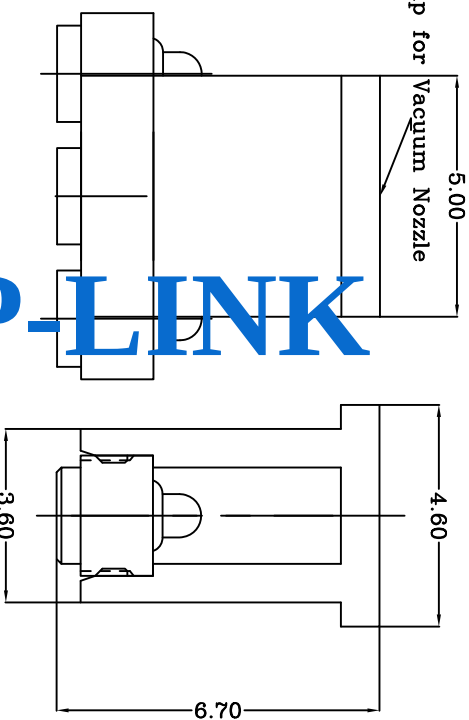


Table 1 Mechanical performance		
working height	2.50mm	90gf min<2.1>
Durability	10000cycle	

TOP-LINK

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - 3 Electrical performance
 - 4 Packaging Specification conforms to EIA 481
 - 5 RoHS compliant.

Item	Part name	Qty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm		100351-3	
0.0 = ± 0.15		DWN: JERRY	APVD:			
0.00 = ± 0.10		CHK:	REL:			
0.000 = ± 0.005		Name POGO PIN CONNECTOR				
SURF. TEXTURE: REMOVE BURRS.		Top-Link Electronics				
BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.		Top-Link Electronics Ltd.				
Scale 1:1	Size A4	DWG No.	C-100351	Page 1/1	Rev. A1	

DIST

Rev. NEW 2013/08/21

Revision record. Date.