
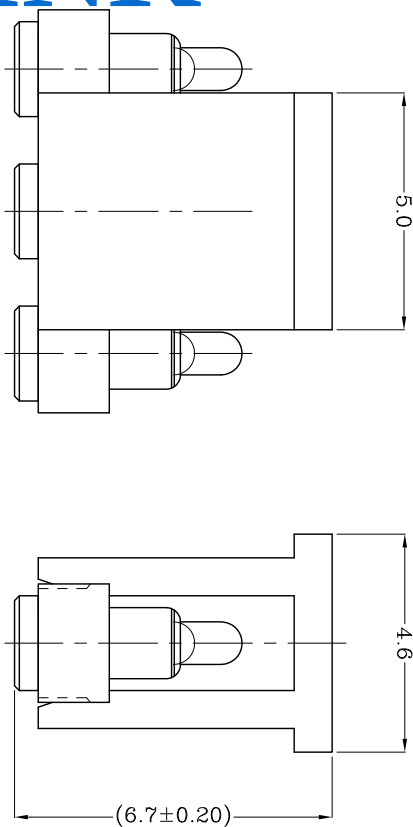
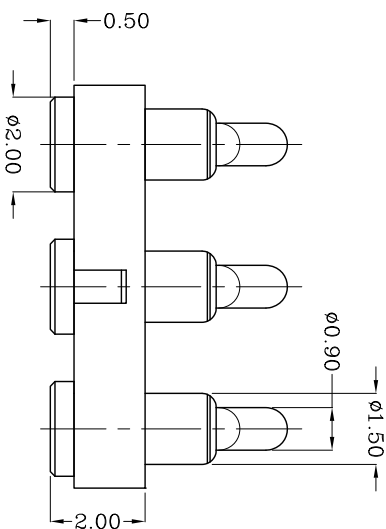
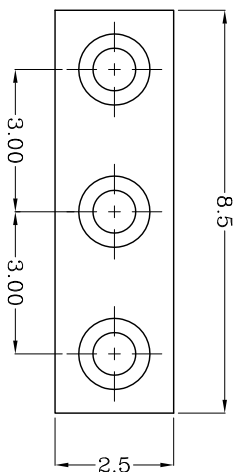


Recommended PCB Layout

Notes:
1 Material, Housing: PA 4.6 (30% Glass Filled)
Color Black.

- c) Mechanical demands:
 - Plating Plunger: Min 0.4um Au over 1.4um Ni
 - Plating Body: Min 0.1um Au over 1.4um Ni
- 3 Electrical
 - a) Contact resistance: 30mOhm Max.
 - b) Current rating: 2.0A
 - c) Operating voltage: 36VDC
 - d) Force: 150±30gf per pin at 1.00mm stroke

LDC	-
DIST	-

	NEW		2012/05/25
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL	HT TR	FIN
0	= $\pm$ -			
0.0	= ± 0.15	DWN	APVD	
0.00	= ± 0.10	QIN		
0.000	= $\pm$	CHK	REL	
ANGLE: $\pm 1^\circ$				
SURF TEXTURE: $32/\sqrt$		NAME		
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX		POGD 3P		
DO NOT SCALE PRINT		PGC-1.5-5.0-R-3P-3.0PH		
SCALE	A4	DWG NO.	SHEET	REV
1:1		C-100418	1 OF 1	B

100418-3
PART NUMBER