


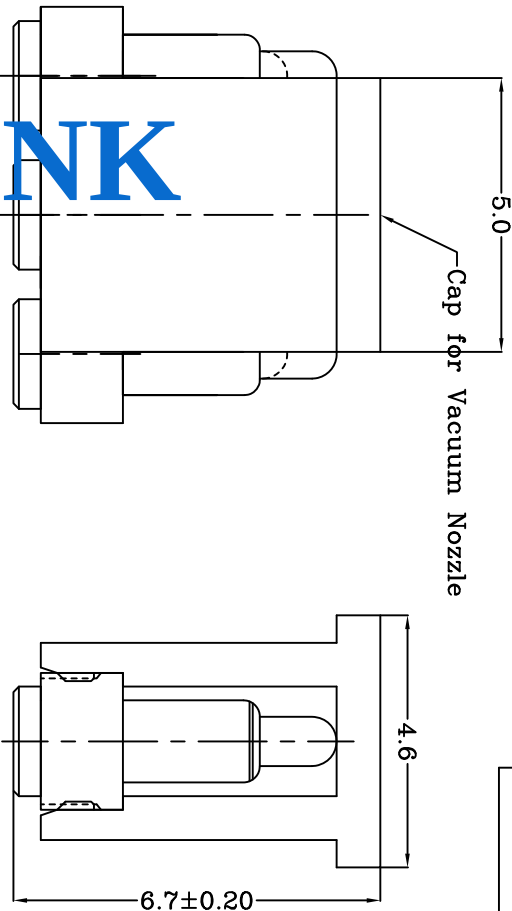
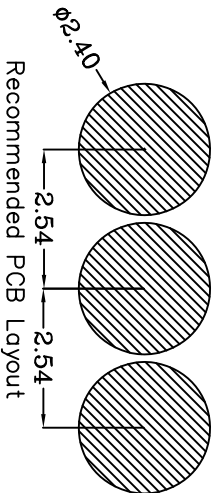


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

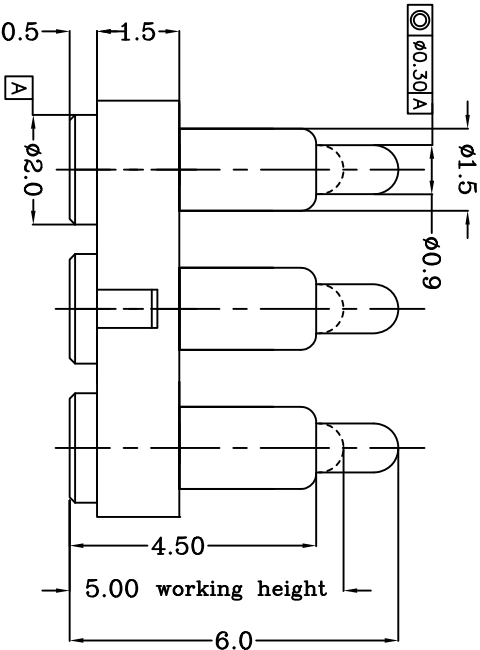

DWG NO.
C-100635

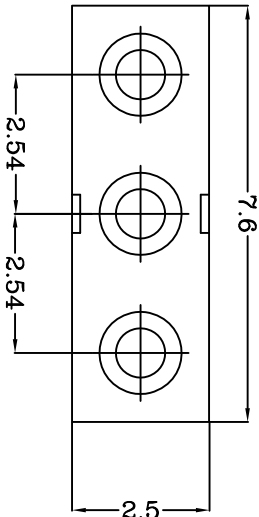

Notes:
1 Material (材质):
Housing: High temp. Plastic, UL94 V-0 Color Black.
Plunger: Brass
Spring: Stainless steel wire

2 Plating:
1 Rocker: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镀底1.4um Min)
2 Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镀底1.4um Min)

3 Mechanical:
Total stroke (总行程): 1.40mm
Durability (寿命): 10,000 cycle min.

4 Electrical (电性能)
Contact resistance (接触阻抗): 30mOhm Max.
Voltage rating (额定电压): 36V DC Max
Current rating (额定电流): 2.0A

LDC	-
DIST	-

LTR	REVISION RECORD	APVD	DATE
	增标同轴度		10/09/09
	NEW		2010/09/08

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DD NOT SCALE PRINT			
MATL	HT TR	FIN	
DWN	APVD		
QIN	REL		
CHK			
NAME	BATTERY POGO CONNECTOR 3 POSITIONS		
SCALE	1:1	A4	DWG NO. C-100635
PGC-15-60-R-3P-254PH			
SHEET	1 OF 1	REV	A

100635-3
PART NUMBER

Top-Link
Electronics L td.

USED ON