

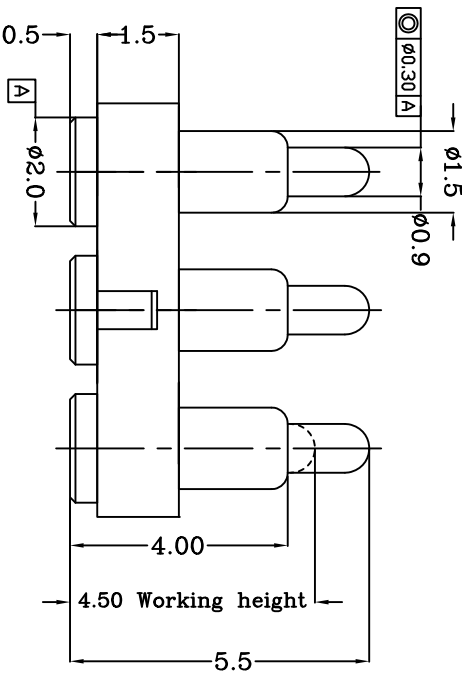


proposal

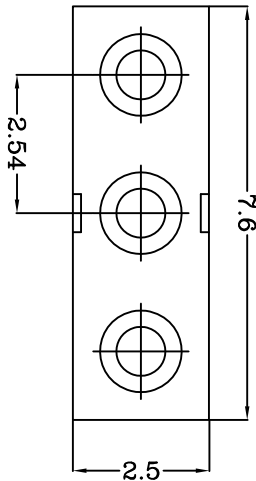

- Notes:
- 1 Demensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2>Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
 - Resistance: 200mOhm Max.Current rating: 1.0A
 - 4 Packaging Spec.Comformance to EIA 481
 - 5 RoHS compliant.

TOP-LINK

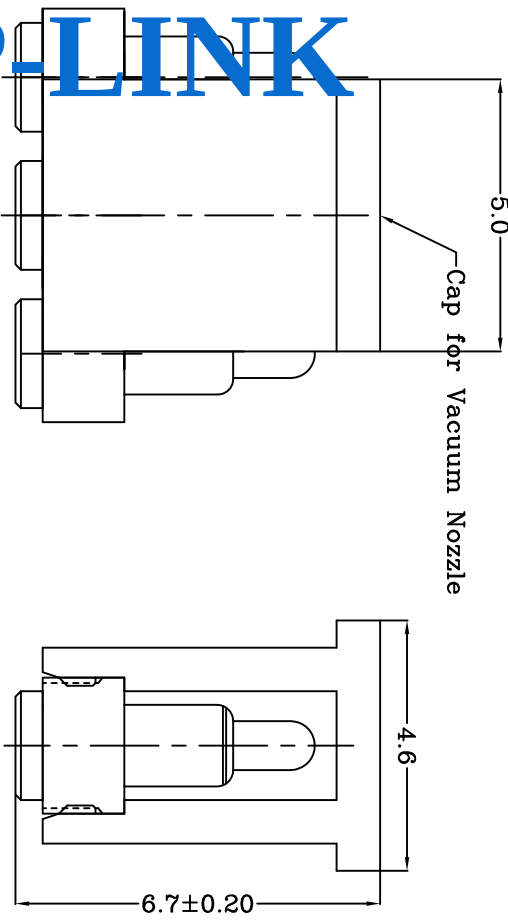

Item	Part name	Q'ty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Table 1 Mechanical performance		
Working height	4.50mm	35±15gf <2.1>
Durability	10000cycle	

DIST

Rev.	NEW	2011/12/28
Revision record.		
Date.		

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight	PART NUMBER
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	Qin Zuozhong	APVD:			100773-3
0.0 = ±0.15	CHK:	REL:				
0.00 = ±0.10						
0.000 = ±0.05						
Angle: ±1°	Name	Customer drawing				
SURF. TEXTURE:	Scale	Size	DWG No.	Page	Rev.	
REMOVE BURRS.	1:1	A4	C-100773	1/1	A	
BREAK SHARP EDGES						
RO.05 MAX.DO NOT						
SCALE PRINT.						

Top-Link Electronics
Top-Link Electronics Ltd.