



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101498

proposal

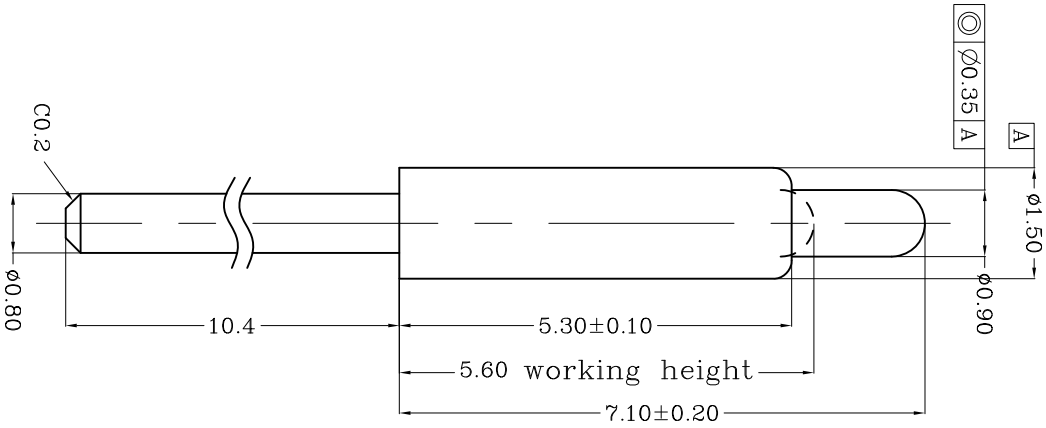

TOP LINK

Not

1 Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<3> The force is the average of forces obtained when plunger goes downwards and upwards.

3 Electrical performance

Resistance: 50mOhm Max.Current rating: 2.0A

4 Packaging Spec.Comformance to EIA 481

5 Reuse complaint.

Table 1 Mechanical performance			
working height	5.60mm	40±10gf	<3.1>
Durability	20000cycle		

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	0.1um Au over 1.4um Ni
2	Plunger	1	Leaded Brass	0.4um Au over 1.4um Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

DIST

Rev.	NEW	2011/06/13
Revision record.		
Date.		

Top-Link Electronics Ltd.			
TOLERANCES UNLESS OTHER SPECIFIED	Type	Unit	Weight
0.0 = ±0.15	DWN:	Customer drawing	mm
0.00 = ±0.10	CHK:	REL:	
0.000 = ±0.05	Angle: ±4°		
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.	Name	POGO PIN PG-0.8-10.4-1.5-5.3-7.1	
Scale 1:1	Size A4	DWG No. C-101498	Page 1/1
			Rev. A

101498-1
PART NUMBER