


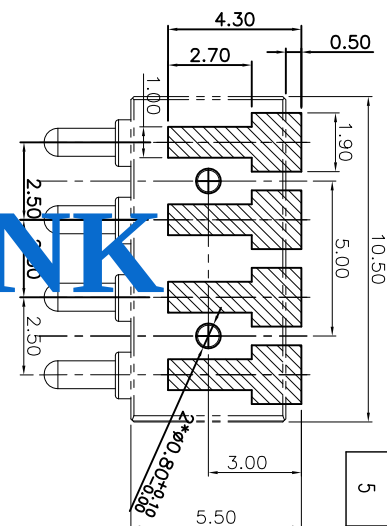
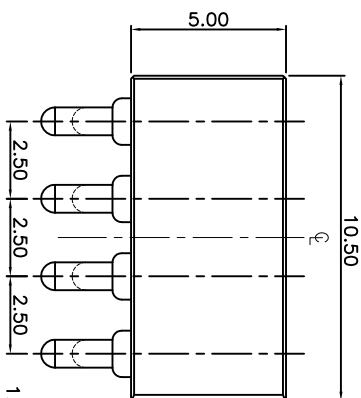
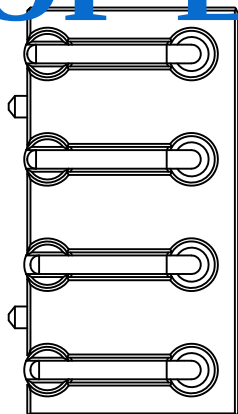


proposal

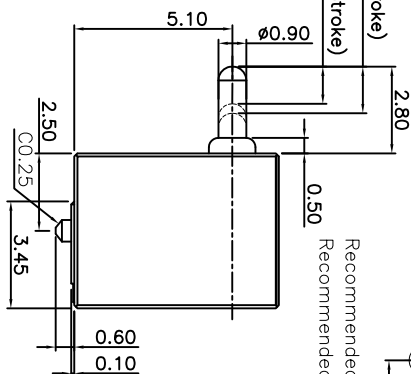

1.50(Max. Stroke)
1.20(Working Stroke)

Recommended P.C.B layout (Component Side)
Recommended thickness of steel stencil : 0.15mm

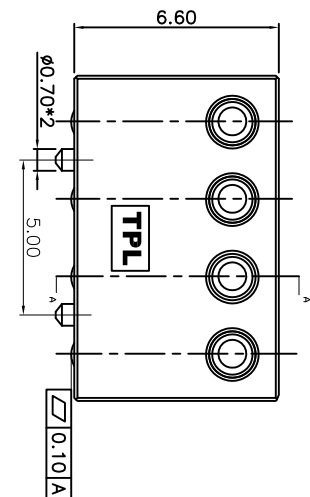


TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per [ASME Y14.5M](#).
- 2 Mechanical performance (See the table 1)
- 3 <2.>The force is the average of forces obtained when plunger goes downwards and upwards.
- 4 Electrical performance
- 5 Resistance: 30mOhm Max. Current rating: 5.0A
- 6 Packaging Spec. Conformance to EIA 481
- 7 RoHS compliant.

Table 1 Mechanical performance	
working stroke	1.2mm
Durability	10000cycle

100385-4	PART NUMBER
----------	-------------



Item	Part name	Qty/Ea	Material	Finish
1	HSG	1	High temp/Plastic UL94 V-0 Color Black	_____
2	Body	4	Leoded Brass	Gold plating over Nickel plating
3	Plunger	4	Leoded Brass	Gold plating over Nickel plating
4	Spring	4	Stainless steel wire	_____
5	Pad	4	Brass	Tin plating over Nickel plating

Rev.	Revision record.	Date.	Top-Link Electronics Ltd. TOLERANCES UNLESS OTHER SPECIFIED 0. = ± 0.15 0.0 = ± 0.10 0.000 = ± — Angle: 41° SURF TEXTURE: REMOVE SHARP EDGES REMOVE BURRS R0.05 MAX DO NOT SCALE PRINT.	Type	Customer drawing	Unit	mm	Weight	
				DWN:	Cai wanlu	APVD:	Top-Link Electronics Top-Link Electronics Ltd.		
				CHK:		REL:			
		Update		2012/09/20	Name			Customer drawing	
	NEW	2008/08/26	Scale			Size	DWG No.	Page	Rev.
			1:1	A4	C-100385	1/1	B		
3			2		1				