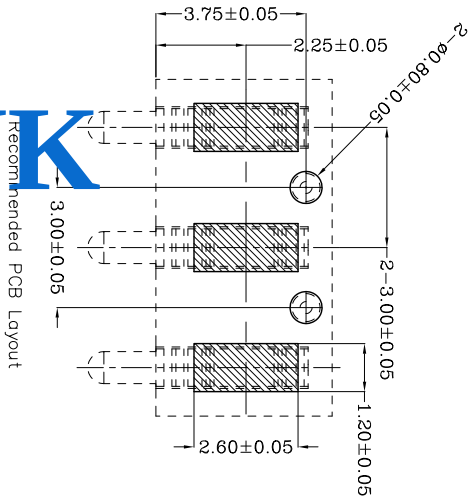



Notes:

Material(材质):

Contact: Brass
Spring : Stainless steel wire

2 Plating:

Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镍底1.4um Min)
Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:

Force: 120 ± 25 gf per pin at 1.0mm stroke
(力: 下压1.0mm的力: 120 ± 25 gf)
Total stroke(总行程): 1.40mm

4 Electrical (电性能)

1)Contact resistance(接触阻抗): 30mOhm Max.

2)Voltage rating(额定电压): 36V DC Max

3) Current rating (额定电流): 2.0A

A diagram showing three parallel tubes, each with a piston at its right end. The tubes are connected to a common vertical line on the left. The top tube has a piston with a rounded head. The middle tube has a piston with a rounded head. The bottom tube has a piston with a rounded head. The tubes are labeled with numbers 1, 2, and 3 from top to bottom.

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

MATL		HT TR	—	FIN	
DWN	APVD	 Top-Link Electronics Ltd			
CHK	REL				

LDC	-
DIST	-

	NEW		2012/01/10
LTR	REVISION RECORD	APVD	DATE