
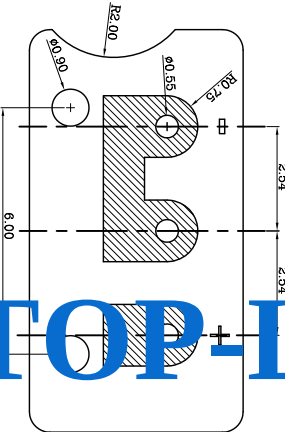
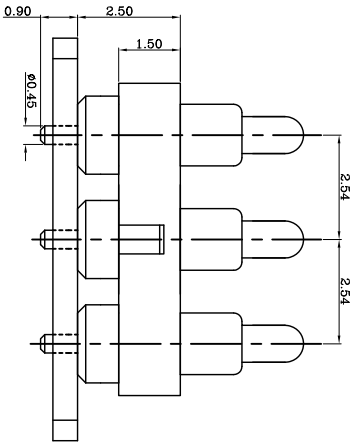
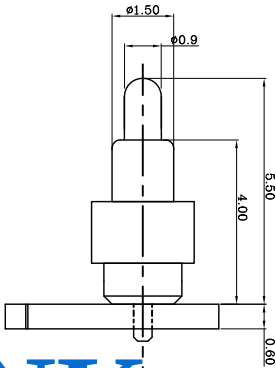


DWG NO.
C-110573

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

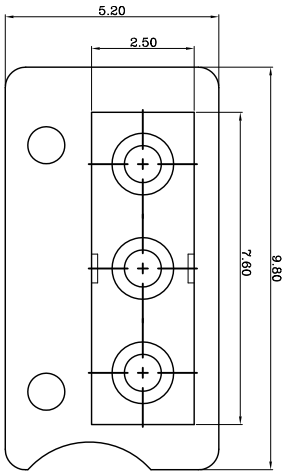

Recommended PCB Layout

TOP-LINK

USED ON

-

Notes:

1)Material(材质):

Housing: PA 46, UL94 V-0 Color Black.

Contact: Brass

Spring :Stainless steel wire

2 Plating:

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:

Total stroke(总行程): 1.50mm

Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

Contact resistance(接触抵抗): 30mOhm Max.

Voltage rating(额定电压): 36V DC Max

Current rating(额定电流): 2.0A

110573-3
PART NUMBER

MATL	HT TR	FIN
1	—	—

DWN	APVD	REL
Qin		
CHK		

NAME	PIN	POSITIONS
POGO	PIN	3
PGC-1.5-5.5-R-3P-2.54PH+PCB		

SCALE	A4	DWG	C-110573	SHEET	REV
1:1		NO.		1 OF 1	B

DIMENSIONS IN MM	TOLERANCES UNLESS OTHER SPECIFIED
0	= ±
0.0	= ±0.15
0.00	= ±0.10
0.000	= ±
ANGLE: ±1°	
SURF TEXTURE: 32/	
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT	

PIN尾巴加长		2010/03/04
PCB变更		2009/12/07
NEW		
REVISION		
RECORD		
APVD		
DATE		
LTR		

4

3

2

1