


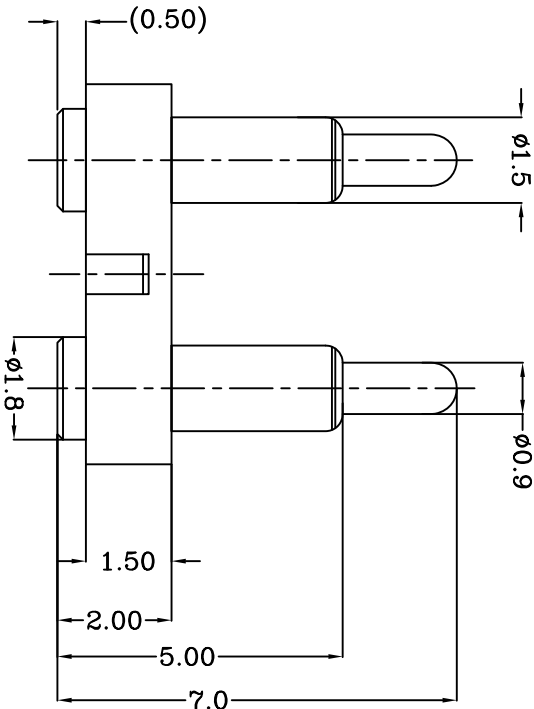
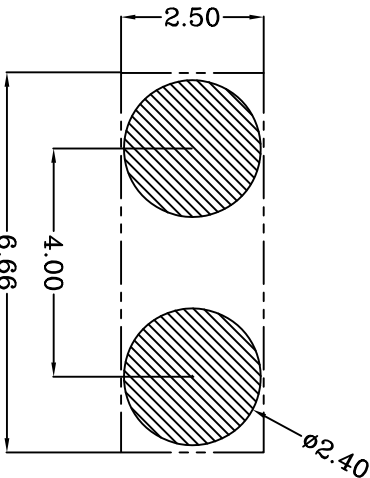


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

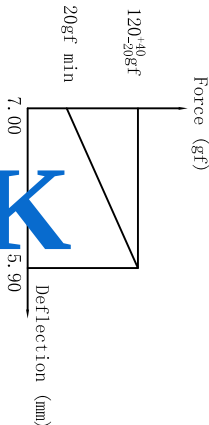

DWG NO.

C-100052

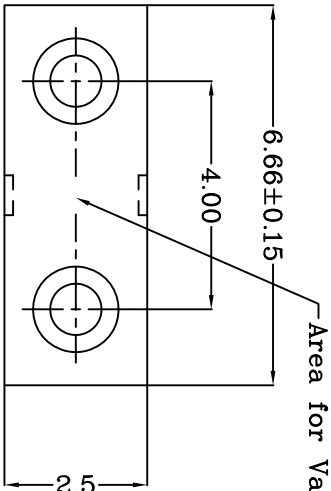

TOP-LINK

Notes:

- 1 Material, Housing: PA 4.6 (30% Glass Filled)
Color Black.
- 2 Mechanical demands:
Plating Plunger: Au plating over Ni plating
Plating Body: Au plating over Ni plating
- 3 Mechanical
1) Total stroke : 2.0mm
2) Durability: 10,000 cycle min.
- 4 Electrical
1) Contact resistance: 30mOhm Max.
2) Operating voltage: 36VDC MAX.
- 5 Packing: Reel Tape

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ± 0.15
0.0 = ± 0.10
0.000 = ± 0.005
ANGLE: ± 1°

SURF TEXTURE: 3.2/

REMOVE BURRS
SHARP EDGES NO.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN
1	—	—

DWG	AWD	REL
Qin	Launsing	—
CHK	REL	—
Jin	REL	—

NAME	BATTERY POGO CONNECTOR 2 POSITIONS
PGC-1.5-7.0-R-2P-4.0PH	—

SCALE	A4	DWG NO.	SHEET	REV
1:1	A4	C-100052	1 OF 1	2

A

B

C

D