
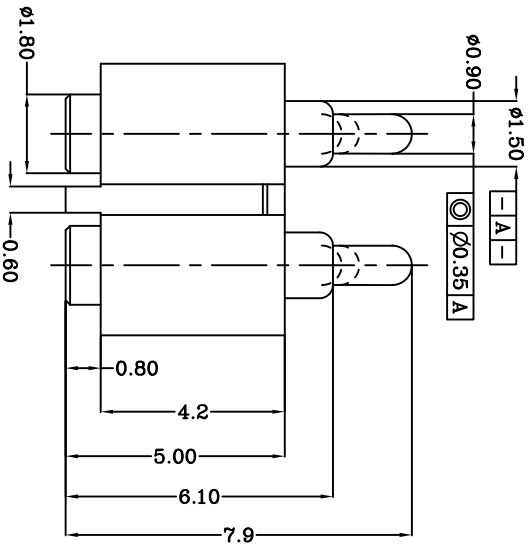
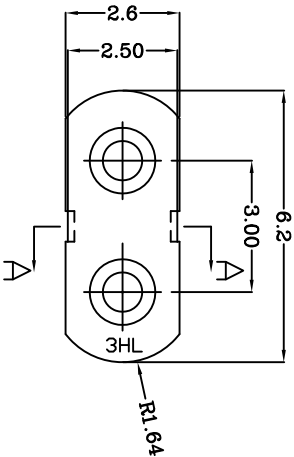



TOP-LINK

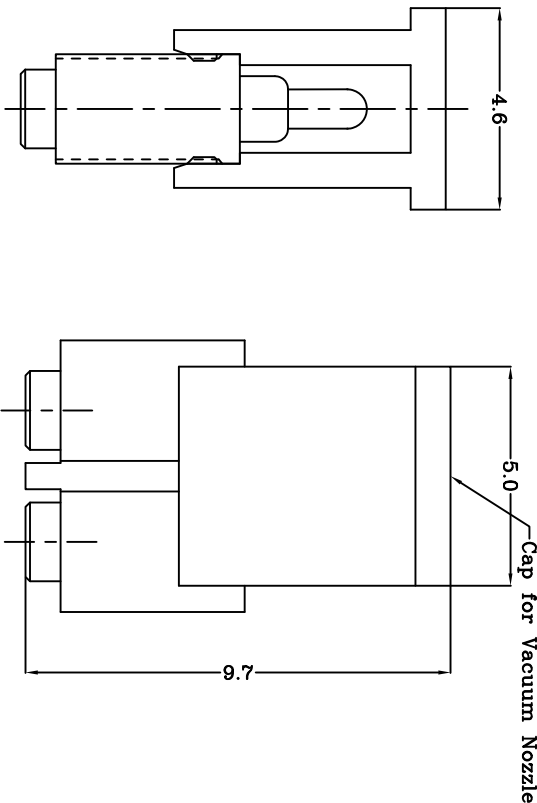

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- 4 Packaging specification conforms to EIA 481
- 5 RoHS compliant.

Table 1 Mechanical performance

working height	6.70mm	100gf Min <2.1>
Durability	10000cycle	

100063-2

PART NUMBER

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight						
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	APVD:		Top-Link Electronics Top-Link Electronics Ltd							
0.0 = ± 0.15		Cai wanlu										
0.00 = ± 0.10		REL:										
0.000 = ± 0.05												
Angle: ±1°												
SURF. TEXTURE:												
REMOVE BURRS:												
BREAK SHARP EDGES												
R0.05 MAX.DO NOT SCALE PRINT.												
		Name						Pogo pin connector				
		Scale	1:1	Size	A4	DWG No.	C-100063		Page	1/1	Rev.	B1

Top-Link Electronics Ltd.

DIST
DIST
DIST