


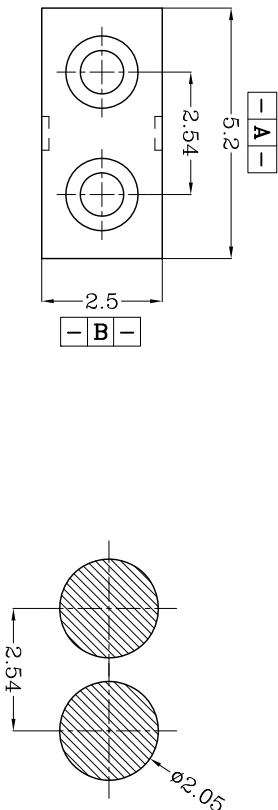


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

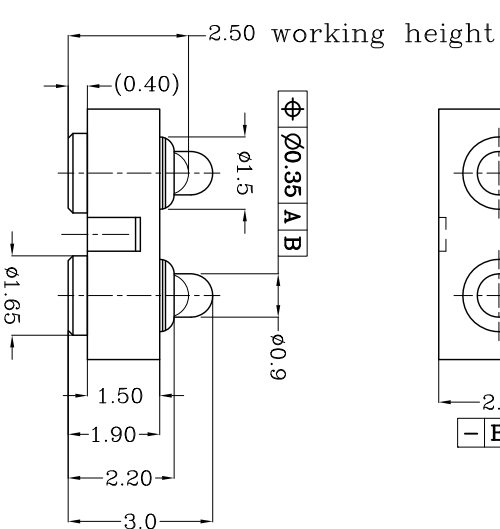

DWN No.:
C-100128

DIST

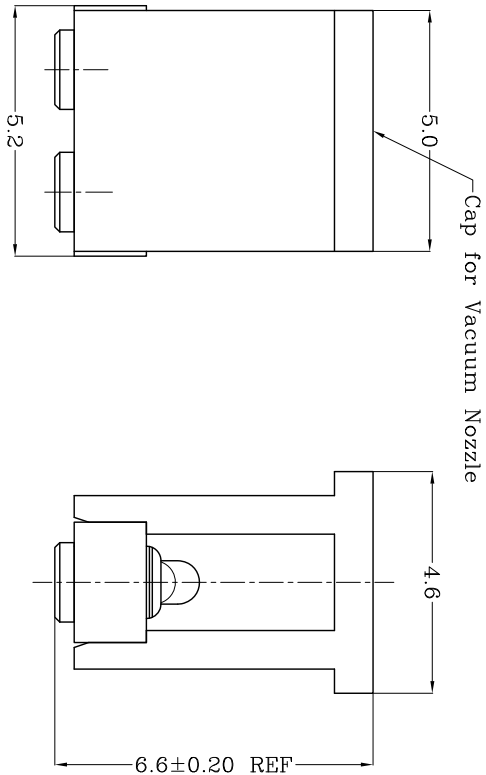

Recommended PCB Layout

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 Electrical performance
Resistance:30mOhm Max.
Current rating: 2.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

Table 1 Mechanical performance		
working height	2.50mm	90 min<2.1>
Durability	10000cycle	

Item	Part name	Qty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Top-Link Electronics Ltd TOLERANCES UNLESS OTHER SPECIFIED 0.0 = ± 0.15 0.00 = ± 0.10 0.000 = ± 0.05 SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.	Type	Customer drawing	Unit	mm	Weight	
	DWN:	Qin Zuozhong	APVD:		<i>Top-Link Electronics</i>	Top-Link Electronics Ltd.
	CHK:		REL:			
	Name	Customer drawing				
	Scale	Size	DWG No.	Page	Rev.	
	1:1	A4	C-100128	1/1	C	