
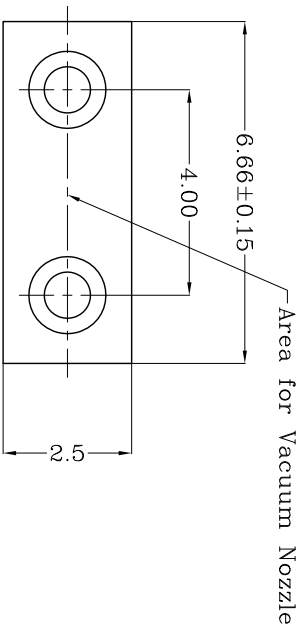




Recommended solder patse thickness is 0.10 mm
Recommended PCB Layout

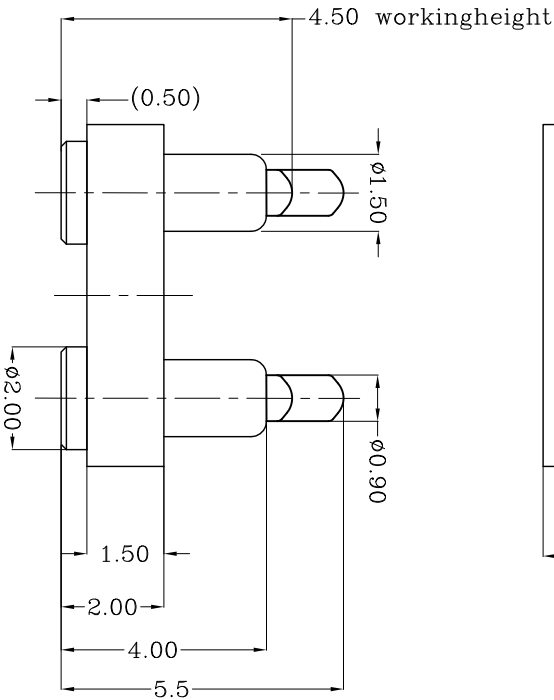

TOP-LINK

Notes:
1) Material(材质):

Housing: PA 46 (30% Glass Filled) Color Black.
Contact: Brass
Spring :Stainless steel wire

2) Plating:

1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镍底1.4um Min)
2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)

LDC	-
DIST	-

	update remark		2007/12/26
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	1	HT TR	—	FIN	—	✓
DWN	Qin	APVD				
CHK	REL					
NAME	PGGD	CONNECTOR	2 POSITIONS			
SCALE	1:1	A4	DWG	PGC-1.5-5.5-R-2P-4.0PH		
			ND: C-100155			

Top-Link
Electronics Ltd.

PART NUMBER

100155-2

USED ON

-