
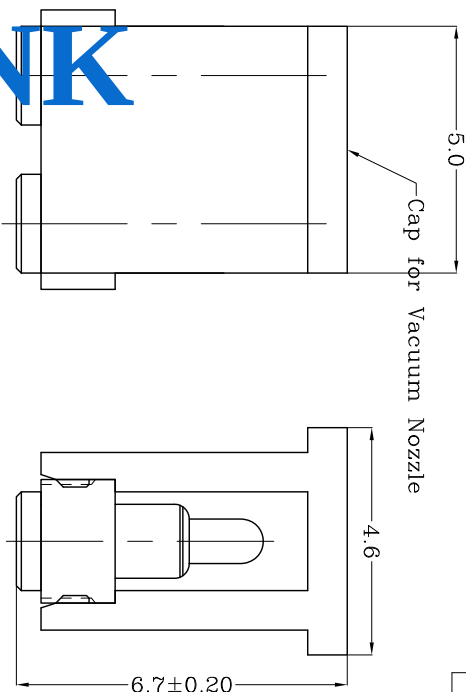
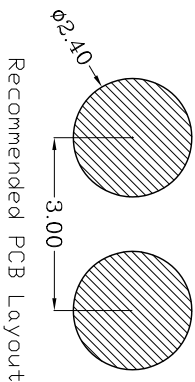


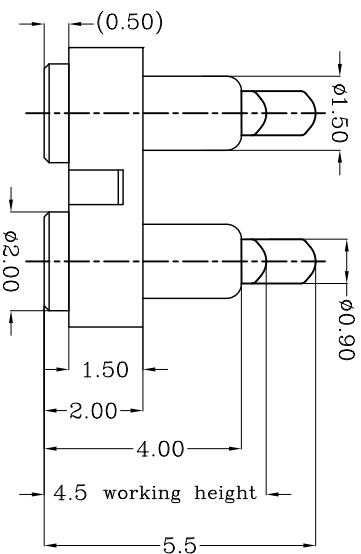

Material

Housing: PA-4.6 + 30% Glass fiber; UL94 V-0 Color Black

Contact: Brass

Spring : mass steel wire

2 Plating:

1)Body: 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 毎4um Min 鍍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 鍍金0.4um Min 鍍底1.4um Min)

3 Mechanica

Total stroke(总行程): 1.40mm

Durability (X-axis): 10,000 cycle min.

4 Electrical (电性能)

Contact resistance(接触抵抗): 30mOhm Max

Voltage rating(额定电压): 36V DC Max

Current rating(额定电流): 2.0A

LDC			NEW		8008/10/31		HANDLE: 21		SURF TEXTURE: 32/ V		REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT		NAME		PGGD CONNECTOR 2 POSITIONS					
-													SCALE		DWG		SHEET		REV	
DIST			LTR		REVISION RECORD		APVD		DATE				1:1		NO.		1 OF 1		A	
-																				

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED	MATL	HT TR	FIN
0 = ±	DWN	APVD	—
0.0 = ±0.15	aln		
0.00 = ±0.10	CHK	REL	
0.000 = ±			
0.000 = ±1*			

100159-2
PART NUMBER