





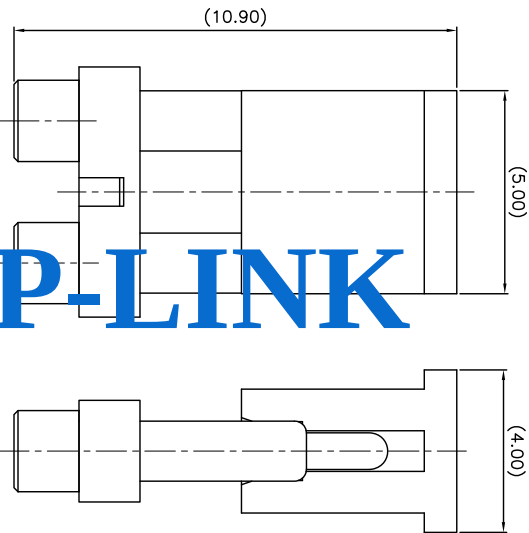


Table 1: Mechanical performance		
Working Height	7.70mm	155±35gf
Durability	10000 Cycles Min.	

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards
 - <2.2>Warning:Working height are not permitted to be less than Min working height
 - 3 Electrical performance
 - <3.1>Current rating: 2.0A
 - <3.2>Voltage rating: 36VAC/DC
 - <3.3>Dynamic Resistance:30mOhm Max (between max and min working height)
 - <3.4>Insulation Resistance:100MOhm minimum
 - 4 Environmental performance
 - <4.1> RoHS compliant
 - <4.2>Operating Temperature range:-40°C~+85°C
 - <4.3>Withstanding High Temperature:260°C/10Sec
 - 5 Packaging:Carrier tape

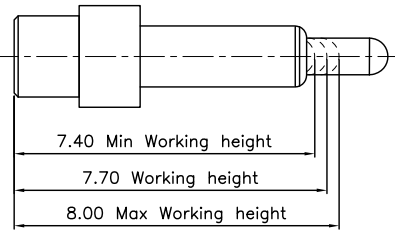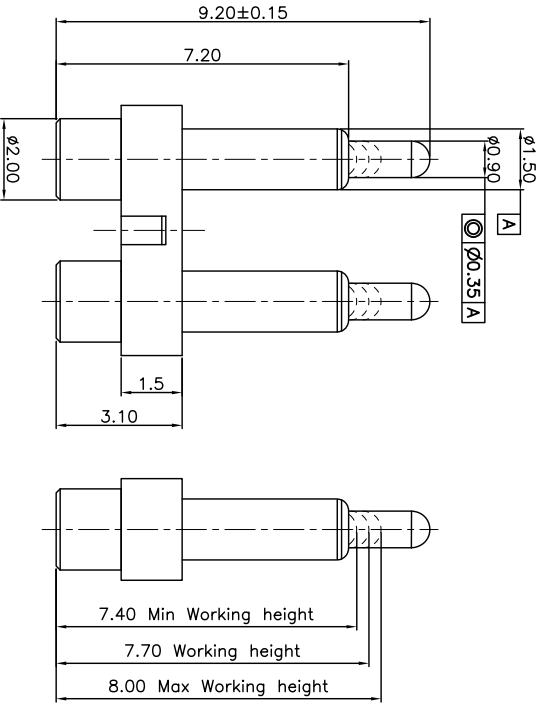

RECOMMEND PCB LAYOUT(TOP VIEW)
Layout Tolerance: ± 0.05mm

TOP-LINK

B	Update	2018/09/17
A	New Release	2008/05/06
Item	Revision record	Date

Top-Link Electronics Ltd.		TOLERANCES UNLESS OTHER SPECIFIED	
0.0 = ± 0.15		0.00 = ± 0.10	
0.000 = ± 0.05		Angle: ±1°	
SURF TEXTURE: REMOVE BURRS.		BREAK SHARP EDGES	
R0.05 MAX DO NOT SCALE PRINT.			
Type	Customer drawing	Unit	mm
DRW:	Caiwanlu	APRD:	
CHK:		REL:	
Name	Pogo Pin Connector		
Scale	Size	A4	Part NO. 100167-2
1:1			
			Page 1/1
			Rev: B

top-link