


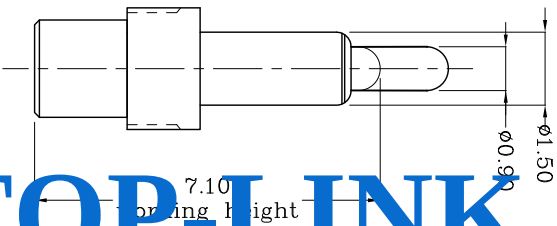



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK ELECTRONICS FACTORY

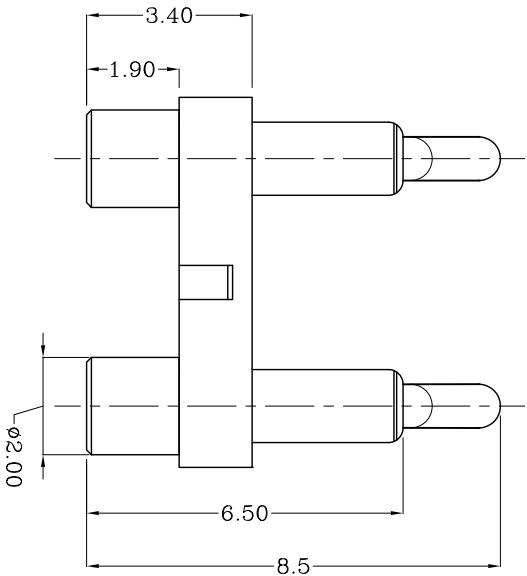

DWG NO.
C-100177

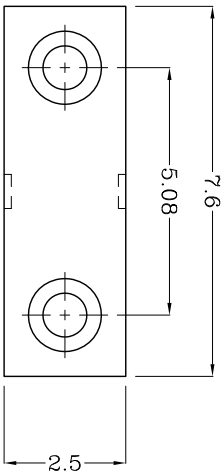

TOP-LINK

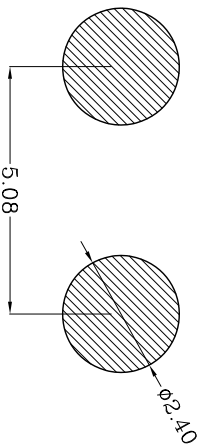


Recommended PCB Layout

Recommended solder paste thickness is 0.10 mm

- Notes:
- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color Black. (UL94V-0)
 - 2 Mechanical demands:
Plating plunger: 0.40um Au over 1.4um Ni
Plating body: 0.10um Au over 1.4um Ni
Force is 115±35 gf at least at working height.

Contact: Brass



LDC	-
DIST	-

ADD	WH	APVD	DATE
REVISION	RECORD		
LTR			

DIMENSIONS IN MM	
TOLERANCES UNLESS	
OTHER SPECIFIED	
0	= ±
0.0	= ±0.15
0.00	= ±0.10
0.000	= ±
ANGLE: ±1°	
SURF TEXTURE: 32/	
REMOVE BURRS, BREAK	
SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT	

MATL	HT TR	FTN
DWN	APVD	
CHK	REL	
NAME	BATTERY CONNECTOR 2 PDS.	
SCALE	1:1	
A4	DWG	
NO.	C-100177	
SHEET	1 OF 1	
REV	B	

100177-2
PART NUMBER

USED ON

-