


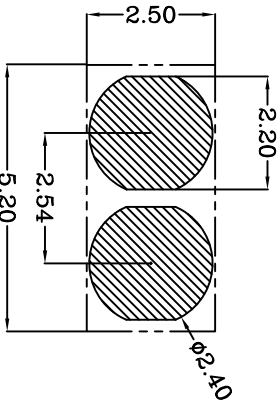



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

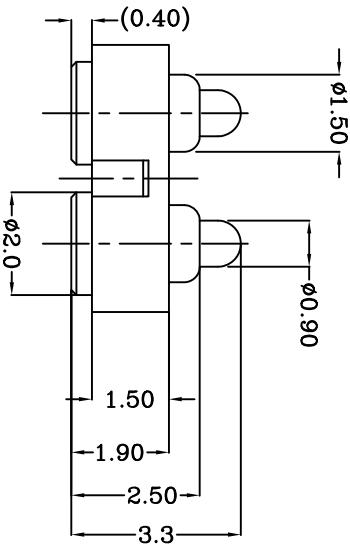

DWG NO.
100209

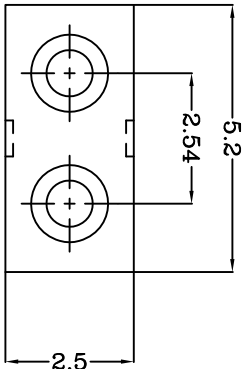

Recommended PCB Layout

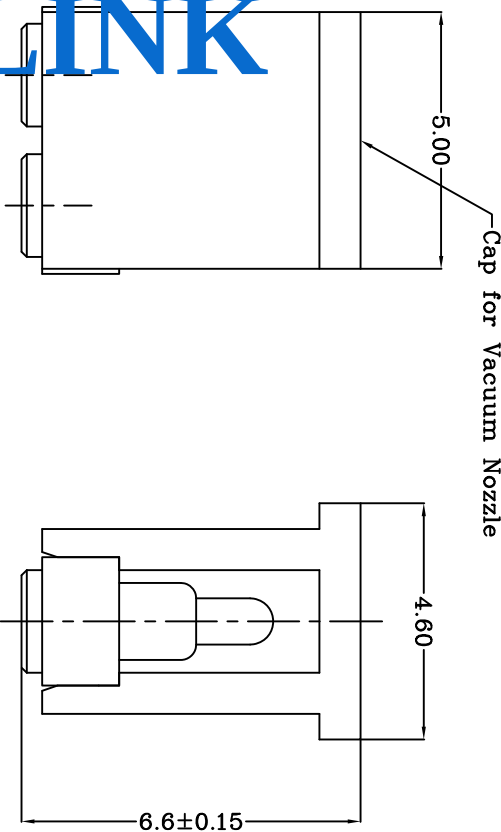

Cap for Vacuum Nozzle

TOP-LINK

- Notes:
- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color Black.
 - 2 Mechanical demands:
Spring force: 90±20 gf with 0.5mm stroke.
Plating Plunger: 0.4µm Au over 1.4µm Ni.
Plating Body: 0.1µm Au over 1.4µm Ni.

Contact: Brass

LDC	-
DIST	-

LTR	NEW	REVISION	APVD	DATE
RECORD				007/10/23

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±	0.0	= ±0.10	0.00	= ±0.10	0.000	= ±
ANGLE: ±1°							
SURF TEXTURE: 32/							
REMOVE BURRS, BREAK							
SHARP EDGES R0.05 MAX							
DO NOT SCALE PRINT							
MATL	1	HT TR	—	FIN	—	—	—
DWN	Benny	APVD	Lansing	REL	Top-Link Electronics Ltd.	Top-Link Electronics Ltd.	Top-Link Electronics Ltd.
CHK	Andy						
NAME	BATTERY	POGO CONNECTOR	2 POSITIONS				
SCALE	1:1	A4	DWG NO.	C-100209	SHEET	1 OF 1	REV A

100209-2	PART NUMBER
----------	-------------

USED ON

-