


DWG NO.
C-100244

DIMENSIONS IN MM		MATERIAL		HT TR		FIN	
TOLERANCES UNLESS OTHERWISE SPECIFIED		1		—		—	
0 = ±		DWN		APVD		Top-Link Electronics Ltd.	
0.0 = ±0.15		qin					
0.00 = ±0.10		CHK		REL			
0.000 = ±							
ANGLE: ±1°							
SURF TEXTURE: 3.2/		NAME		PGO2 CONNECTOR 2 POSITIONS			
REMOVE BURRS, BREAK SHARP EDGES P0.05 MAX				PGC-1.5-6.3-R-2P-2.54PH			
DO NOT SCALE PRINT		SCALE		DWG NO. C-100244		SHEET 1 OF 2	
		A4				REV B	

2 Mechanical demands:
Spring force: 105 ± 25 g with 1.0mm stroke.
Full stroke: 1.5mm
Plating Plunger: Min. 0.4um Au over 1.4um Ni
Plating Body: Min. 0.1um Au over 1.4um Ni.

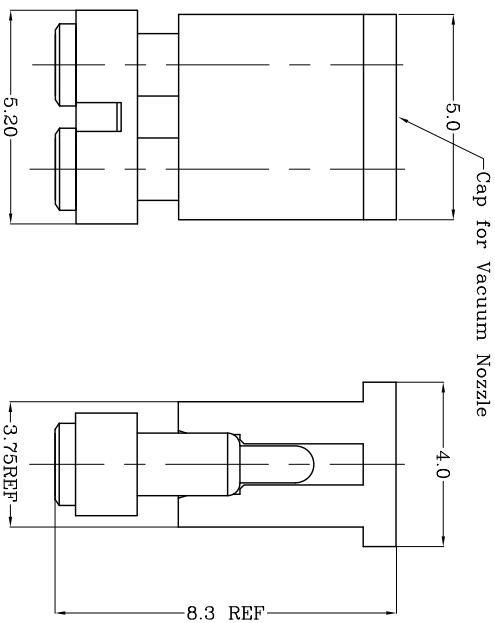

Technical drawing showing two circles with a center-to-center distance of 2.54 and a diameter of $\phi 2.20$.

Recommended solder paste thickness is 0.10 mm

TOP-LINK

100244-2
PART NUMBER