


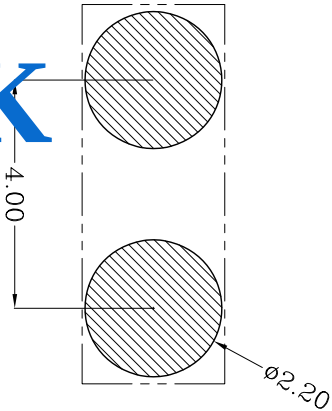



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

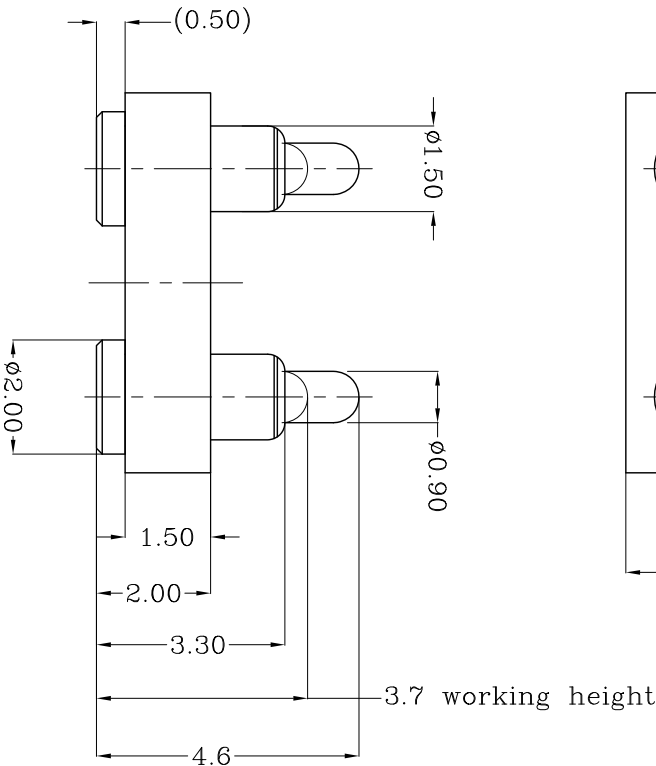

DWG NO.
C-100261

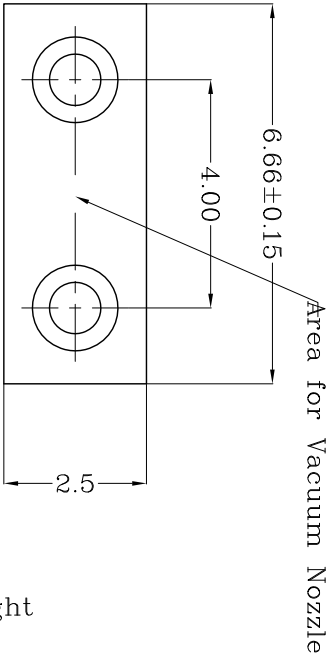

Recommended PCB Layout

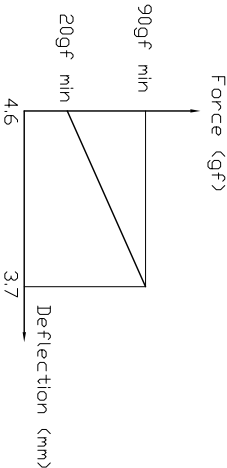

- Notes:
- 1 Material, Housing: PA 4.6 (30% Glass Filled)
Color Black.
 - 2 Mechanical demands:
Contact: Brass
Plating Plunger: 0.4um Au over 1.4um Ni
Plating Body: 0.1um Au over 1.4um Ni.

TOP-LINK

USED ON

-

LDC	-
DIST	-

L TR	NEW	2009/09/11
REVISION		
RECORD		
APVD		
DATE		

DIMENSIONS IN MM			
TOLERANCES UNLESS			
OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	△ 1	HT TR	—
DWN		APVD	
CHK		REL	
NAME BATTERY POGO CONNECTOR 2 POSITIONS			
PGC-1.5-4.6-R-2P-4.0PH			
SCALE	1:1	A4	DWG NO. C-100261
SHEET 1 OF 1			
REV A			

100261-2

PART NUMBER

FIN

— V

Top-Link
Electronics L td.

A

B

C

D