

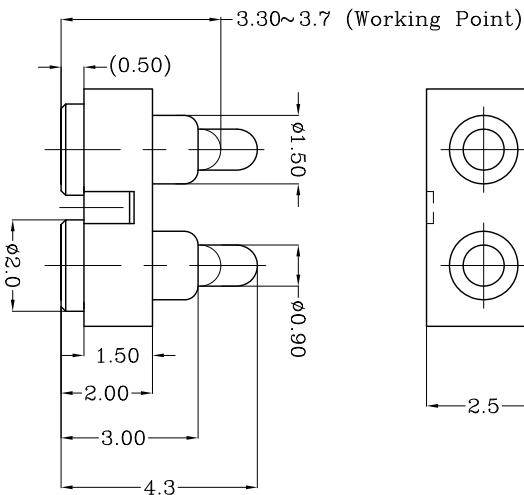

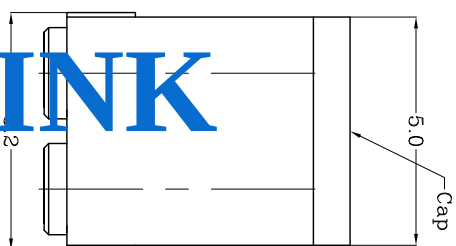


Recommended solder paste thickness is 0.10 mm

Recommended PCB Layout

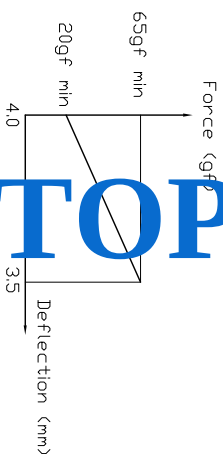

Cap for Vacuum Nozzle

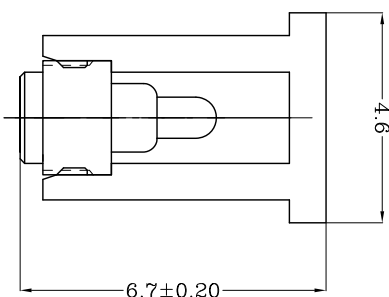

TOP-LINK

Notes:

¹ Material, Housing: PA 4.6 (30% Glass Filled)

Color Black.

Contact: Brass

2 Mechanical demands:

Plating Plunger: 0.4um Au over 1.4um Ni

Plating Body: 0.1um Au over 1.4um Ni

	更新PCB尺寸		2010/07/12
	NEW		2008/12/02
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED	MATL		HT	TR	—	FIN	—	✓
	△1							
	DWN		APVD					
	Qln			<i>Top-Link</i>				Top-Link
	CHK		REL	<i>Electronics</i>				Electronics Ltd.
0 = ± 0.0 = ±0.15 0.00 = ±0.10 0.000 = ± ANGLE: ±1°								
SURF TEXTURE: 32/ ✓	NAME							
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	BATTERY POGO CONNECTOR 2 POSITIONS PGC-1.5-4.3-R-2P-2.54PH							
SCALE	A4	DWG NO.	C-100266			SHEET 1 OF 1	REV B	

100266-2
PART NUMBER