


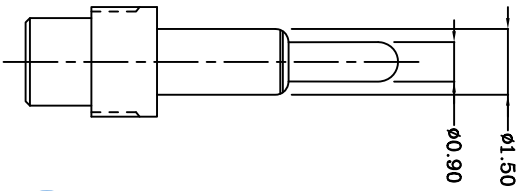




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK ELECTRONICS FACTORY

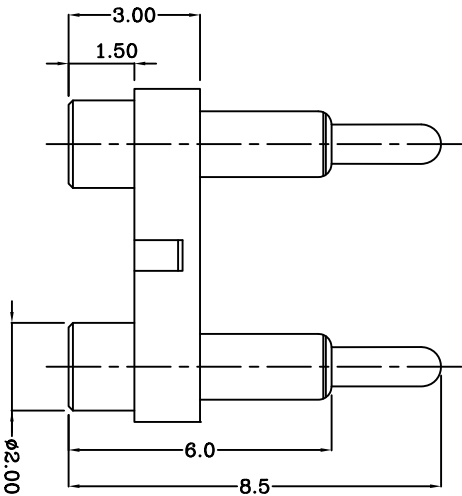

DWG NO.
C-100271

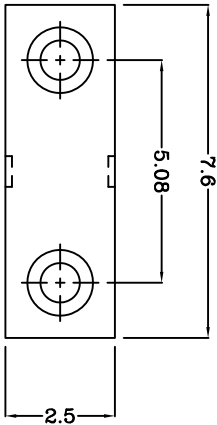

TOP-LINK

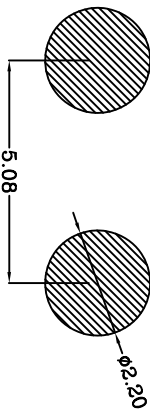

Recommended PCB Layout
Recommended solder paste thickness is 0.10 mm

Notes:
1 Material, Housing: PA 4,6 (30% Glass Filled)
Color: Black. (UL94V-0)

2 Mechanical demands:
Contact: Brass
Plating plunger: 0.4um Au over 1.4um Ni
Plating body: 0.1um Au over 1.4um Ni
Force is 125±30gf at 1.0 mm stroke.

USED ON
-

100271-2

PART NUMBER

HT TR — FIN — V

MATL DWN QIN APVD Lansing Top-Link Electronics Ltd.
CHK Jm REL

NAME BATTERY CONNECTOR 2 POS.

PGC-15-8.5-R-2P-508PH

SCALE 1:1 A4 DWG NO. C-100271

REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DD NOT SCALE PRINT

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
V

DATE

APVD

REVISION

LTR

LDC

DIST

-

4

3

2

1