
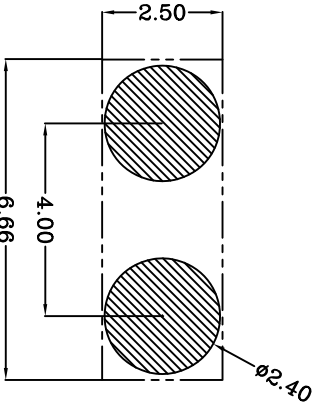
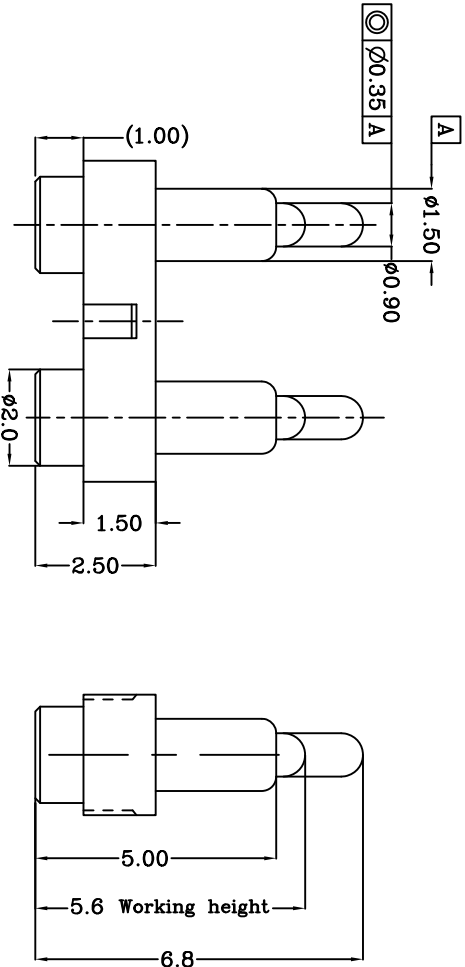


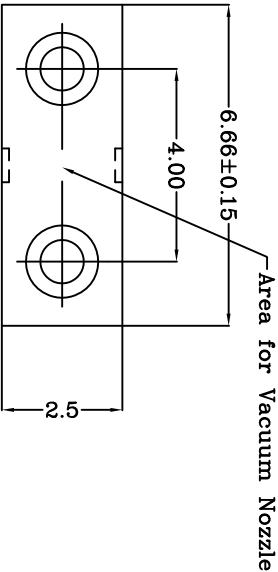

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3.2>Warning: Working height are not permitted to be less than Min working height.
- 4 Electrical performance
- 5 Resistance: 50mOhm Max.Current rating: 2.0A
- 6 Packaging Spec.Comformance to EIA 481
- 7 RoHS compliant.

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5				

Table 1 Mechanical performance		
working height	5.60mm	100gf min<2.1>
Durability	10000cycle	

100352-2
PART NUMBER

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	Qin Zuozhong	APVD:		
0.0 = ±0.15	CHK:	REL:			
0.00 = ±0.10					
0.000 = ±0.05					
Angle: ±1°					
SURF. TEXTURE:	Name	Customer drawing			
REMOVE BURRS:	Scale	Size	DWG No.	Page	Rev.
BREAK SHARP EDGES	1:1	A4	C-100352	1/1	A
RO.05 MAX. DO NOT					
SCALE PRINT.					

Top-Link
Electronics Ltd.