

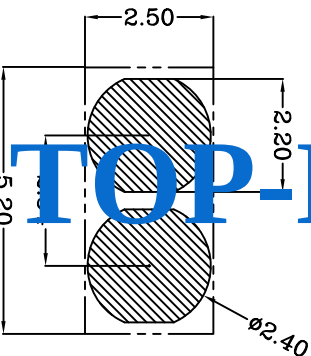
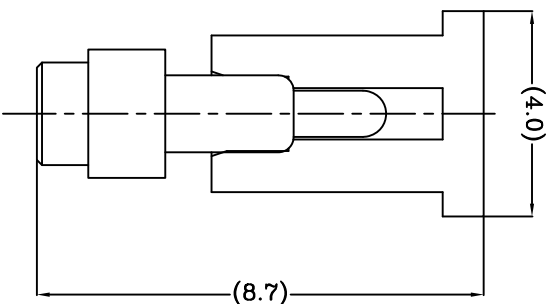
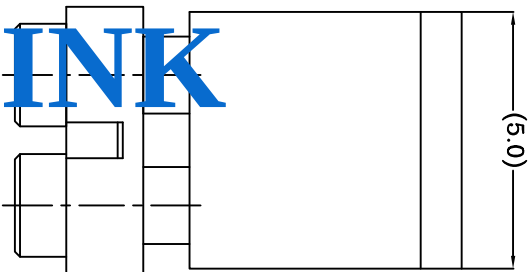
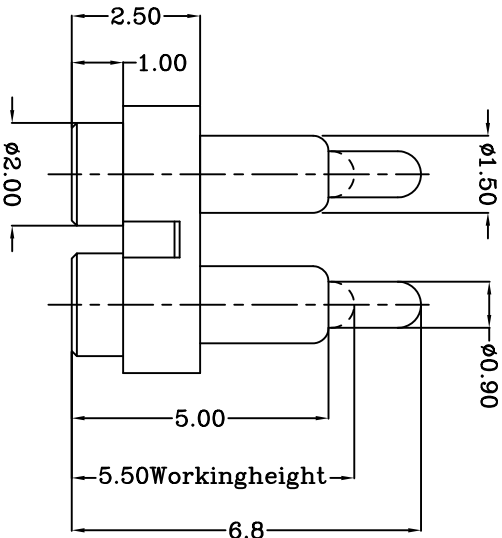





Recommended PCB Layout

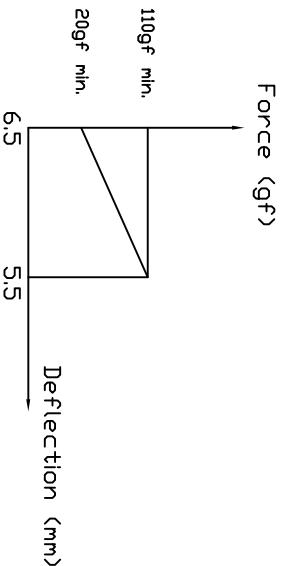

- Notes:
- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color: Black.
 - 2 Mechanical demands:
Plating Plunger: Min 0.4um Au over 1.4um Ni
Plating Body: Min 0.1um Au over 1.4um .
contact resistance: 30mOhm max.
durability : 10000cycles min.

Contact: Brass

LDC

-

DIST

-

4

3

2

1

USED ON

-

100457-2
PART NUMBER

MATL	HT	TR	FIN
DVN	1	—	—
Jm	APVD	LAN	—
CHK	REL	—	—
ANDY	—	—	—

NAME: BATTERY POGO CONNECTOR 2 POSITIONS
PGC-1.5-6.8-R-2P-2.54PH
Top-Link Electronics Ltd.

SCALE: 1:1
A4
DWG NO: C-100457
SHEET 1 OF 1
REV A

REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

LTR	REVISION	RECORD	APVD	DATE
NEW	RECORD	APVD	DATE	0000/12/00