
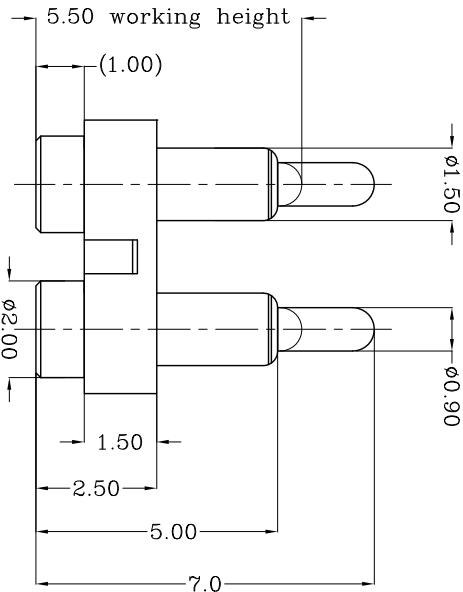
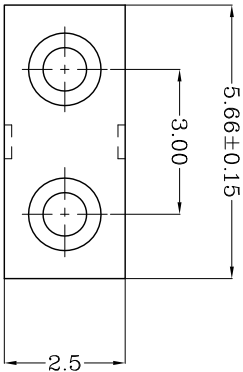

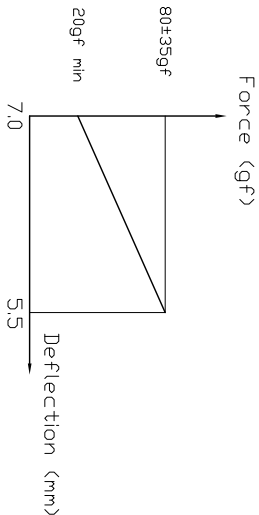


Recommended solder paste thickness is 0.10 mm

Recommended PCB Layout

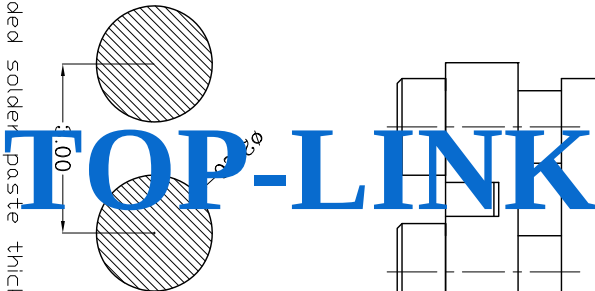

Notes:
1 Material, Housing: PA 4,6 (30% Glass Filled)
Color: Black.

2 Mechanical demands:
Contact: Brass
Plating Plunger: 0.4um Au over 1.4um Ni
Plating Body: 0.1um Au over 1.4um Ni.

LDC
-
DIST
-

NEW	2009/02/24
REVISION	
RECORD	
APVD	
DATE	

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN
DWN	APVD	Lansing
CHK	REL	Top-Link Electronics Ltd.
JIN		
NAME	BATTERY POGO CONNECTOR 2 POSITIONS	
SCALE	1:1	A4
DWG NO.	C-100483	
SHEET	1 OF 1	REV A

USED ON

-

100483-2

PART NUMBER

A

B

C

D