


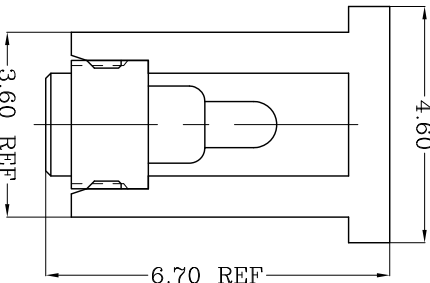
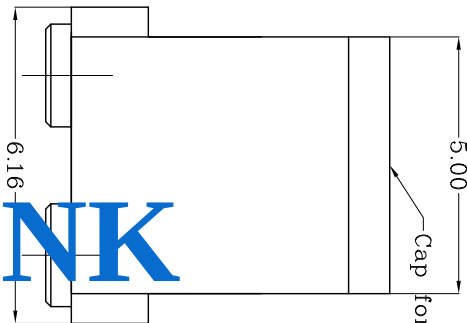
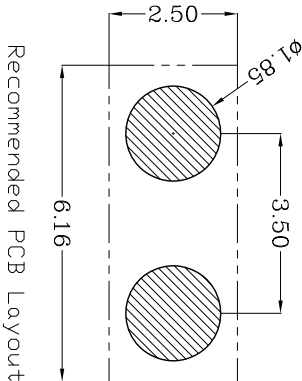


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

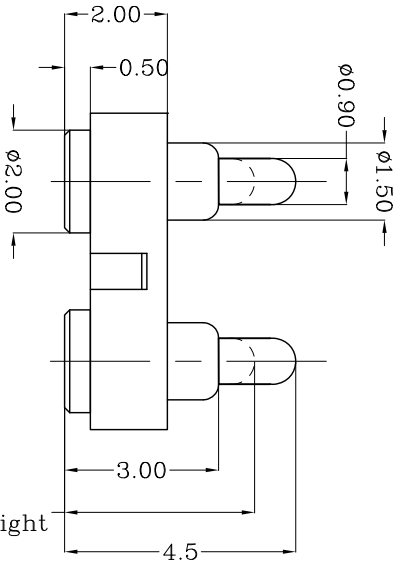

DWG NO.  
C-100543-2

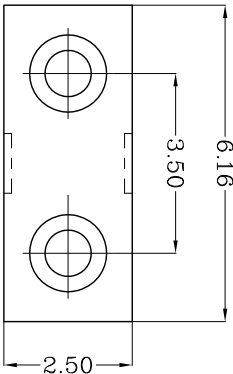

Notes:

1) Material (材料):  
Housing: PBT UL94 V-0 Color Black.  
Contact: Brass  
Spring: Stainless steel wire

2) Plating:

1) Body: min. 1.4um Gold plating over min. 1.4um Nickel plating (Body: 鍍金 1.4um Min 鍍底 1.4um Min)  
2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 鍍金 0.4um Min 鍍底 1.4um Min)

3) Mechanical:

Total tested (总行程): 1.40mm  
Durability (寿命): 10,000 cycle min.

4) Electrical (电性能)

Contact resistance (接触抵抗): 30mOhm Max.  
Voltage rating (额定电压): 36V DC Max  
Current rating (额定电流): 2.0A

LDC  
-  
DIST  
-

LTR  
REVISION  
RECORD  
NEW  
APVD  
DATE  
2009/06/26

DIMENSIONS IN MM  
TOLERANCES UNLESS  
OTHER SPECIFIED  
0 = ±  
0.0 = ±0.15  
0.00 = ±0.10  
0.000 = ±  
ANGLE: ±1°  
SURF TEXTURE: 32/  
REMOVE BURRS, BREAK  
SHARP EDGES R0.05 MAX  
DO NOT SCALE PRINT

MATL  
DWN  
CHK  
NAME  
SCALE  
1:1  
A4  
DWG  
NO.  
C-100543-2  
PGD CONNECTOR 2 POSITIONS  
PGC-1.5-4.5-R-2P-3SPH  
Top-Link  
Electronics  
SHEET  
1 OF 1  
REV  
A

100543-2  
PART NUMBER

USED ON  
-