






THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

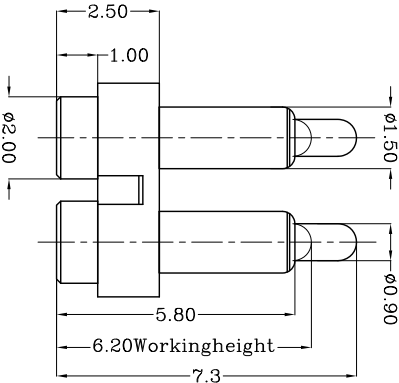

DWG NO.
C-100620



Recommended PCB Layout
Recommended solder patse thickness is 0.10 mm

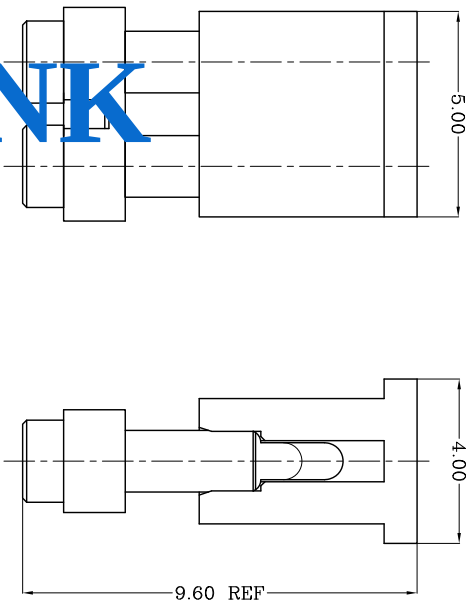

Notes:

1. Material (材质): PA 4.6 (30% Glass Filled) Color Black.
2. Plating: Min 0.1um Gold plating over min. 1.4um Nickel plating (电镀: 镀金0.1um Min 镀底1.4um Min)
3. Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (电镀: 镀金0.4um Min 镀底1.4um Min)
4. Electrical (电性能)
Contact resistance (接触电阻): 30mOhm Max.
Voltage rating (额定电压): 36V DC Max
Current rating (额定电流): 2.5A

2. Plating

Min 0.1um Gold plating over min. 1.4um Nickel plating (电镀: 镀金0.1um Min 镀底1.4um Min)
Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (电镀: 镀金0.4um Min 镀底1.4um Min)

3. Mechanical

Total stroke (总行程): 1.40mm
Durability (寿命): 10,000 cycle min.
Contact resistance (接触电阻): 30mOhm Max.
Voltage rating (额定电压): 36V DC Max
Current rating (额定电流): 2.5A

100620-2
PART NUMBER

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°

SURF TEXTURE: 32/
REMOVE BURRS. BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL HT TR FIN

DWN QIN APVD REL

NAME POGO PIN CONNECTOR 2 POSITIONS
SCALE 1:1 A4 DWG NO. C-100620 SHEET 1 OF 1 REV 1

USED ON

4

3

2

1