
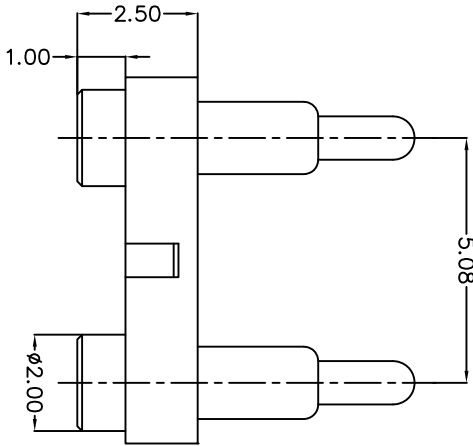
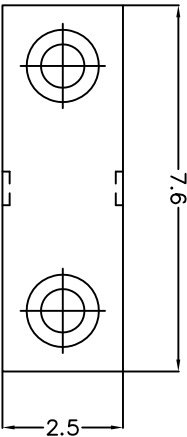
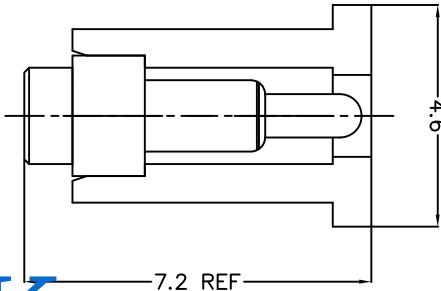
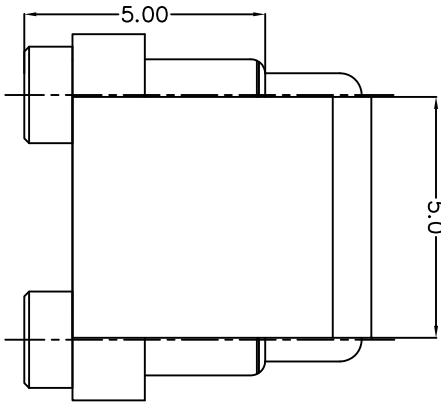


TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 Electrical performance
- 4 Resistance:100mOhm Max.Current rating: 1.0A
- 5 Packaging Spec.Comformance to EIA 481

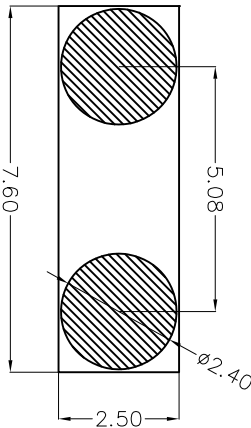

Recommended PCB Layout

Table 1 Mechanical performance		
Working height	6.00mm	25±15gf <2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5				

Top-Link Electronics Ltd.		Type	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Customer drawing		Top-Link Electronics Top-Link Electronics Ltd.
0.0 = ± 0.15		CHK:	Qin Zuozhong		
0.00 = ± 0.10		REL:			
0.000 = ± 0.05					
Angle: ±1°					
SURF. TEXTURE:					
REMOVE BURRS.					
BREAK SHARP EDGES					
R0.05 MAX. DO NOT					
SCALE PRINT:					
Name		Customer drawing			
Scale	Size	DWG No.			
1:1	A4	C-100743	Page	1/1	Rev. A

DIST

4

3

2

1