

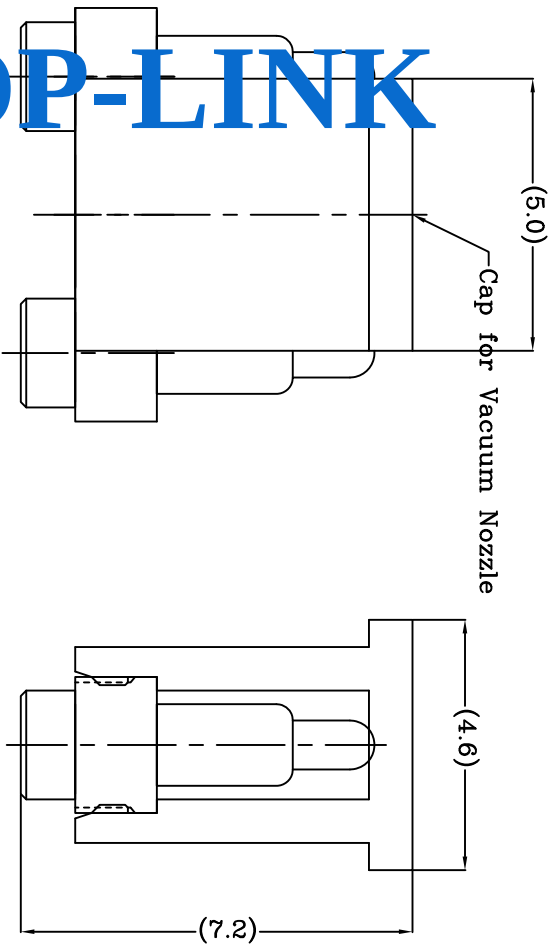


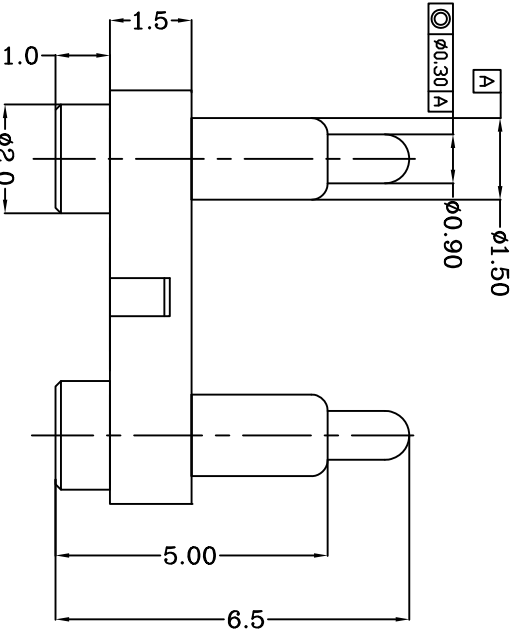

proposal

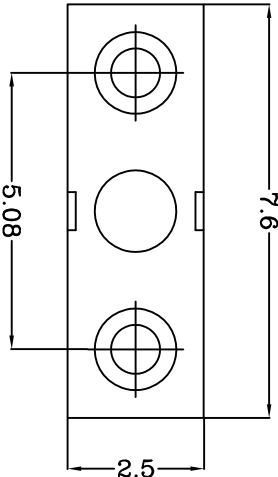

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

TOP-LINK

Table 1 Mechanical performance

Working height	5.50mm	125±30gf
Durability	10000cycle	

- Notes:
- 1 Demensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - 3 Electrical performance
Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 Packaging Spec.Comformance to EIA 481
 - 5 RoHS compliant.

DIST

DIST

Rev.	NEW	2012/11/28
Revision record.	Date.	

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	Cai wanlu	APVD:		
0.0 = ±0.15	CHK:	REL:			
0.00 = ±0.10					
0.000 = ±0.05					
Angle: ±1°	Name	Customer drawing			
SURF. TEXTURE:					
REMOVE BURRS.					
BREAK SHARP EDGES					
R0.05 MAX.D0 NOT	Scale	Size	DWG No.	Page	Rev.
SCALE PRINT.	1:1	A4	C-100924	1/1	2

Top-Link Electronics Ltd.

PART NUMBER
100924-2