
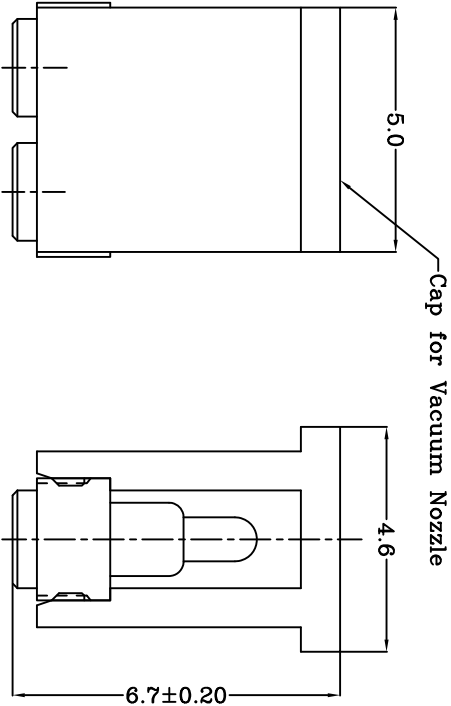

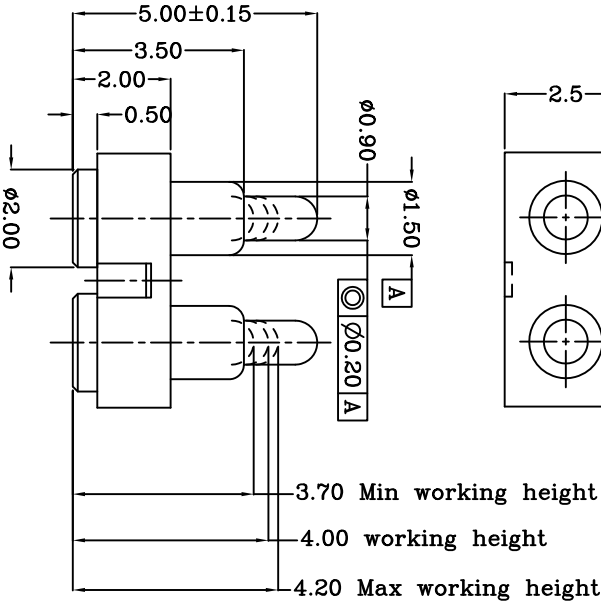


proposal



TOP-LINK

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards
 - <2.2>Warning:Working height are not permitted to be less than Min working height
 - 3 Electrical performance
 - <3.1>Current rating: 2.0A
 - <3.2>Voltage rating: 36VAC/DC
 - <3.3>Dynamic Resistance:30mOhm Max (between max and min working height)
 - <3.4>Insulation Resistance:100M0hm minimum
 - 4 Environmental performance
 - <4.1>RoHS compliant
 - <4.2>Salt Spray:48h Min
 - <4.3>Operating Temperature range: -40°C~+85°C
 - <4.4>Withstanding Higt Temperature:260°C/10Sec
 - 5 Packaging:Carrier tape

Table 1:Mechanical performance		
Working Height	4.0mm	60±15gf
Durability	10000 Cycles Min.	

5	CAP	1	High temp,Plastic; UL94 V-0 Color Black	-----
4	Body	1	Leaded Brass	Au plating 0.1um min Ni plating 1.4um min
3	Plunger	1	Leaded Brass	Au plating 0.25um min Ni plating 1.4um min
2	Spring	1	Stainless steel wire	-----
1	Housing	1	High temp,Plastic; UL94 V-0 Color Black	-----
Item	Part Name	Q'ty	Material	Finish

Type	Customer drawing	Unit	mm
DWN:	Alon	APVD:	
CHK:		REL:	
NAME	Pogo PIN Connector		
Scale	1:1	Size	A4
Part NO.	10101021714	Page	1/1
Rev:	XA		

top-link

Top-Link Electronics Ltd
TOLERANCES UNLESS
OTHER SPECIFIED
0.0 = ± 0.15
0.0 = ± 0.10
0.000 = ± 0.005
Angle: 30°
SURF. TEXTURE:
REMOVE BURRS.
BREAK SHARP EDGES
R0.05 MAX DO NOT
SCALE PRINT.

Item	Revision record	Date
XA	New Release	2016.07.25