



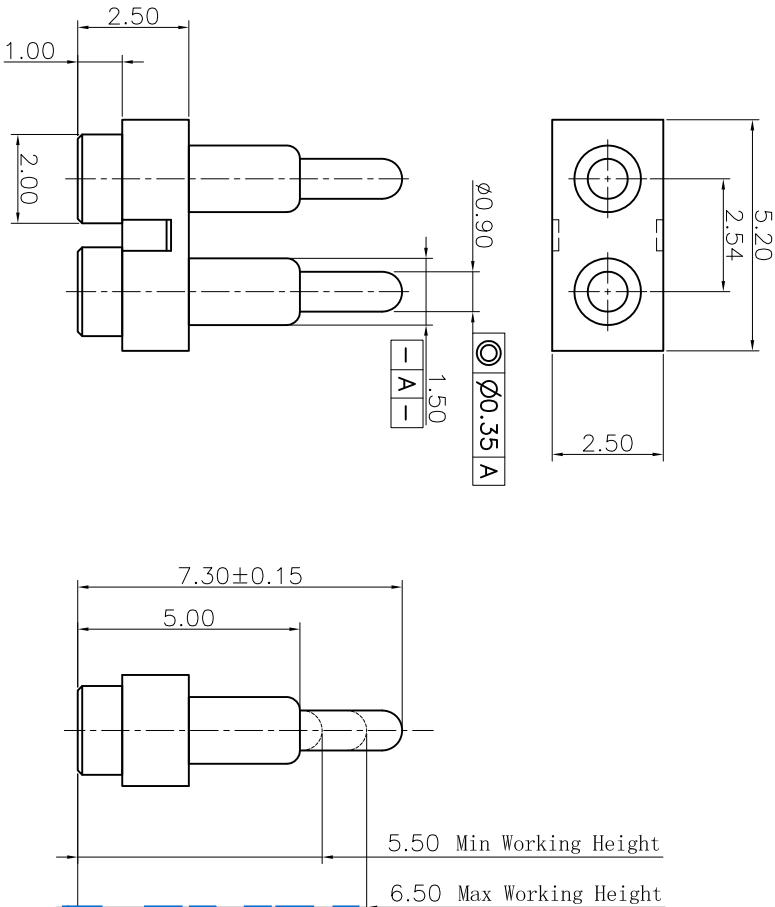

TOP-LINK

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards
 - <2.2>Warning:Working height are not permitted to be less than Min working height
 - 3 Electrical performance
 - <3.1>Current rating: 2.0A
 - <3.2>Voltage rating: 36VAC/DC
 - <3.3>Dynamic Resistance:30mOhm Max (between max and min working height)
 - <3.4>Insulation Resistance:100MOhm minimum
 - 4 Environmental performance
 - <4.1>RoHS compliant
 - <4.2>Salt Spray:48h Min
 - <4.3>Operating Temperature range: -40°C~+85°C
 - <4.4>Withstanding Higt Temperature: 260°C/10Sec
 - 5 Packaging: Carrier tipe

Table 1:Mechanical performance		
Max Working Height	6.50mm	90 $\pm$ 20gf
Durability	10000 Cycles Min.	

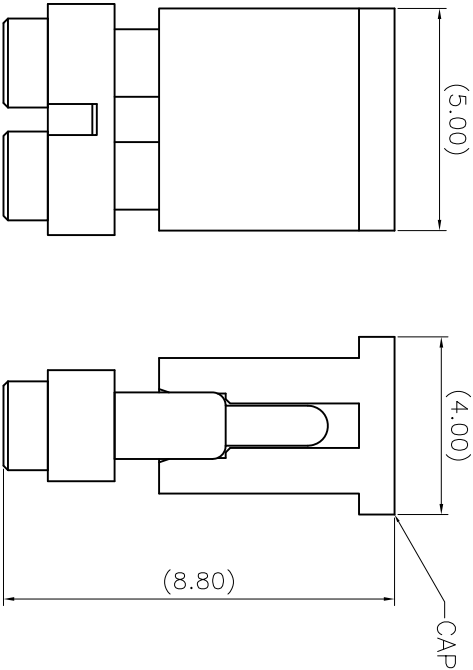

Top-Link
Electronics Ltd.
TOLERANCES UNLESS
OTHER SPECIFIED
0.0 = $\pm$ 0.15
0.00 = $\pm$ 0.10
0.000 = $\pm$ 0.05
Angle: $\pm$ 1°
SURF. TEXTURE:
REMOVE BURRS.
BREAK SHARP EDGES
R0.05 MAXDO NOT
SCALE PRINT.

5	CAP	1	High temp,Plastic; UL94 V-0 Color Black	-----
4	Body	2	Leaded Brass	Au plating 0.1um min Ni plating 1.4um min
3	Plunger	2	Leaded Brass	Au plating 0.4um min Ni plating 1.4um min
2	Spring	2	Stainless steel wire	-----
1	Housing	1	High temp,Plastic; UL94 V-0 Color Black	-----
Item	Part Name	Q'TY	Material	Finish
Type		Customer drawing		Unit
DWN:		APVD:		mm
CHK:		REL:		<i>top-link</i>
NAME				
Pogo PIN Connector				
Scale	Size	Part NO.		Page
1:1	A4			1/1
				Rev:
				XB

top-link