


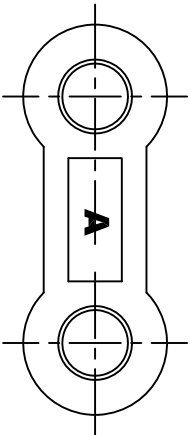

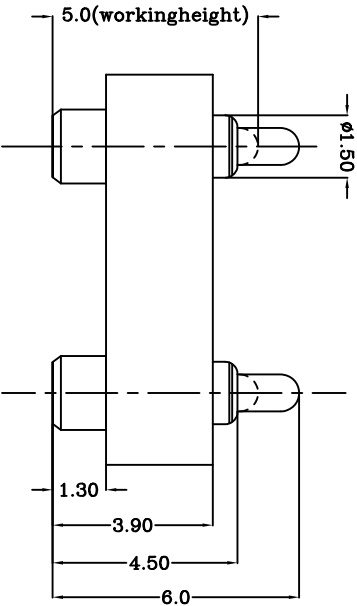


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

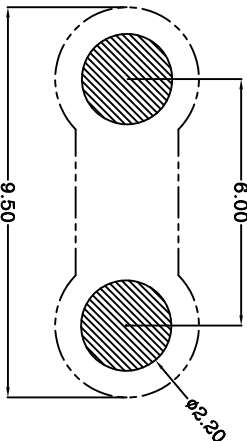

DWG NO.
C-110641

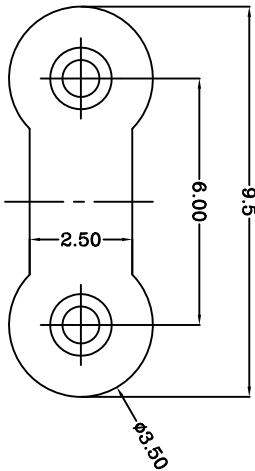

TOP-LINK

Notes:

- Material(材质):
Housing: PA 4.6 (30% Glass Filled) Color Black.
Contact: C36000 & C27000
Spring : Stainless steel wire
- Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镀底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镀底1.4um Min)
- Mechanical:
Total stroke(总行程): 1.40mm
Durability(寿命): 10,000 cycle min.
4 Electrical(电性能)
Contact resistance(接触抵抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°

SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN
1	—	—

DWN	APVD	REL
HE		
CHK		

NAME	SCALE	A4	DWG NO.	C-110641	SHEET 1 OF 1	REV A
PGGD CONNECTOR 2 POSITIONS PGC-1.5-6.0-R-2P-6.0PH	1:1	A4	DWG NO.	C-110641	SHEET 1 OF 1	REV A

USED ON

—

A

B

C

D

4

3

2

1

LDC	—
DIST	—

NEW		2010/09/20
REVISION RECORD	APVD	DATE
LTR		