


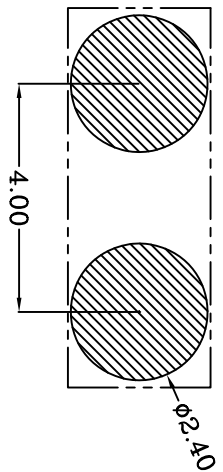
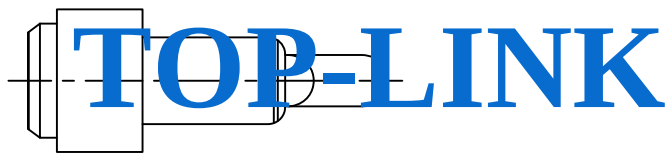


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

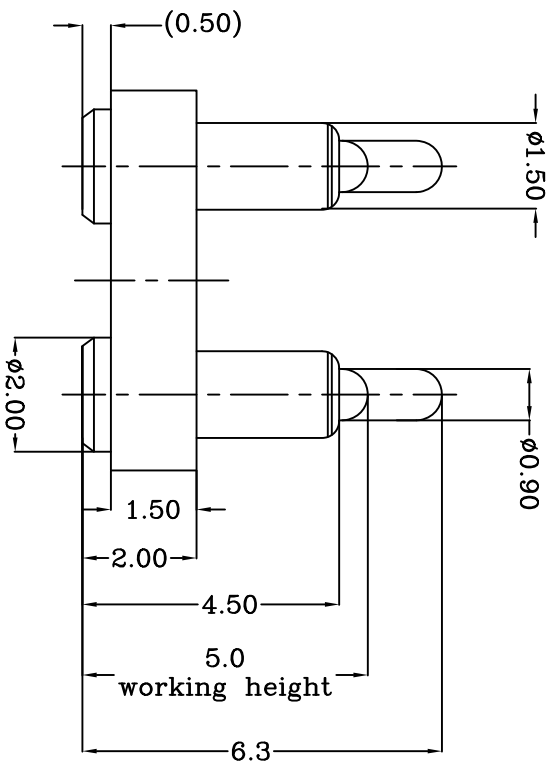

DWG NO.
C-100203

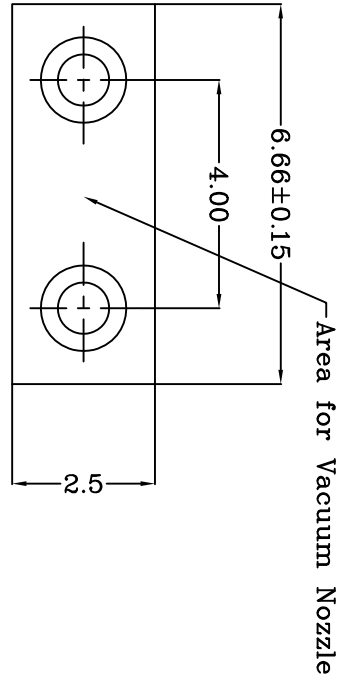

Recommended PCB Layout

Notes:
1 Material, Housing: PA 4,6 (30% Glass Filled)
Color: Black.

Contact: Brass

- 2 Mechanical demands:
Plating Plunger: Min. 0.4µm Au over 1.25µm Ni
Plating Body: Min. 0.1µm Au over 1.25µm Ni.
- 3 Mechanica
1)Force: 90gf min per pin at 1.3mm stroke
2)Total stroke : 1.60mm
3)Durability: 10,000 cycle min.

100203-2

PART NUMBER

LDC	-
DIST	-

LTR	取消倒角	APVD	2007/12/04
REVISION	RECORD	DATE	

DIMENSIONS IN MM			
TOLERANCES UNLESS			
OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	—
DWN		APVD	
Benny		Lansing	
CHK		REL	
Andy			
NAME	BATTERY POGO CONNECTOR 2 POSITIONS		
SCALE	1:1	A4	
ND	C-100203		
FIN	—		
SHEET	1 OF 1		
REV	B		

USED ON
—